




Connectivity

2016

FIBRAIN ®

5	Fiber Optic Adapters – SC series <i>Page 5</i>	
11	Fiber Optic Adapters – LC series <i>Page 11</i>	
17	Fiber Optic Adapters - E2000™ series <i>Page 17</i>	
18	Fiber Optic Adapters - FC&ST series <i>Page 18</i>	
20	Patchcords & Pigtails - Silver Grade <i>Page 20</i>	
21	Patchcords & Pigtails - Gold Grade <i>Page 21</i>	
22	Patchcords & Pigtails - Titanium Grade <i>Page 22</i>	
24	Master Class Patchcords <i>Page 24</i>	
26	Pigtail SET <i>Page 26</i>	
27	Cross-connect drop cables NEW <i>Page 27</i>	
29	Resibend® cables NEW <i>Page 29</i>	
30	MTP®/MPO solution NEW <i>Page 30</i>	
37	Multipatchcords <i>Page 37</i>	
56	Mechanical connector and splice - Rapid Series <i>Page 56</i>	

Fiber Optic Adapters

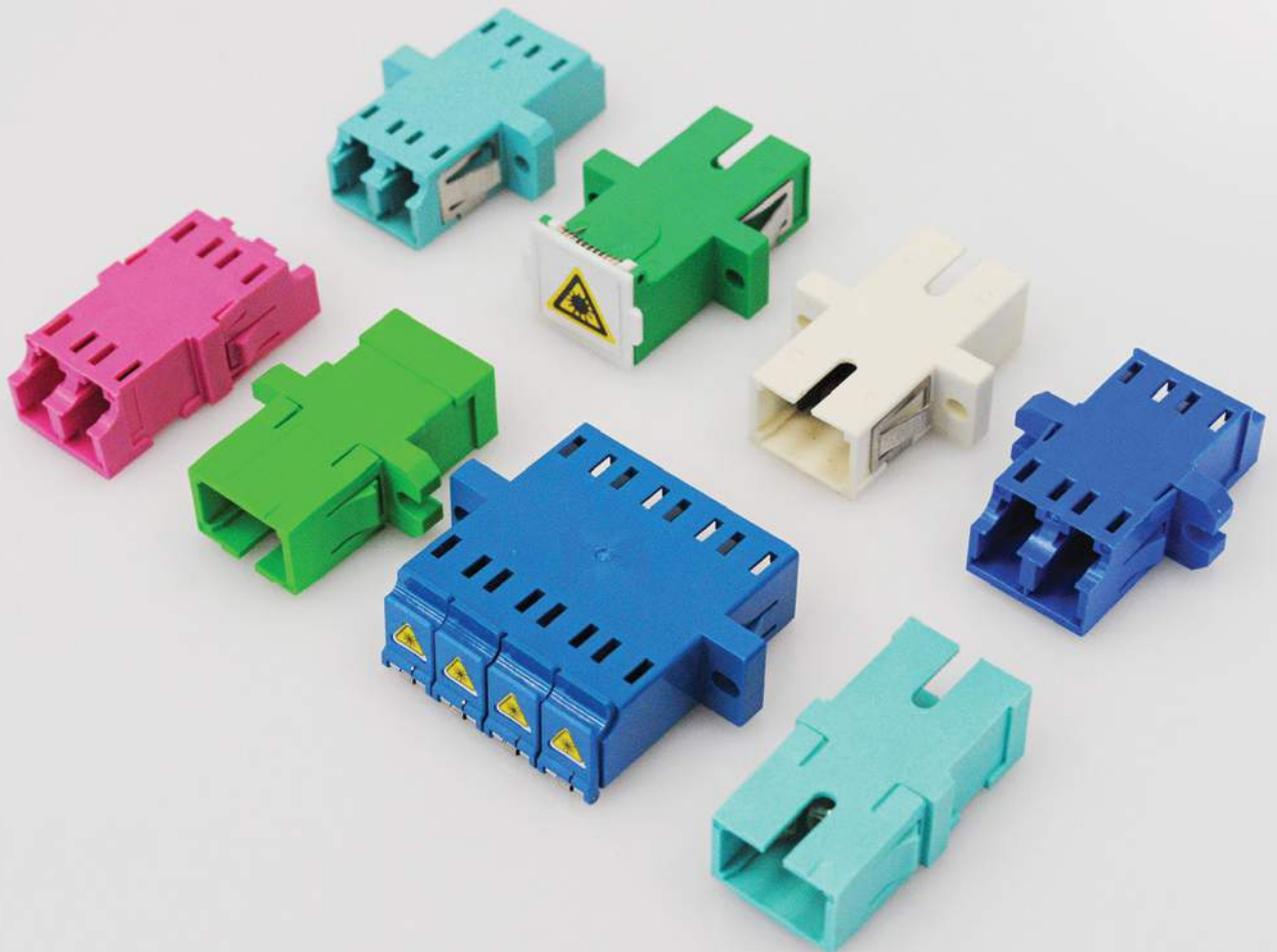

One-Piece Evolution



HIGHEST QUALITY AND DURABILITY



1992

WELDED PIECE


2000

2014

INCREASED SIDE LOADING PERFORMANCE




ONE-PIECE TECHNOLOGY

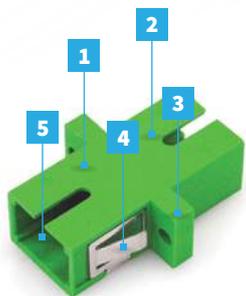


SC Standard *One-Piece*

1. "One-Piece Design" technology
2. Housing available in 5 colors
3. Flange or flangeless configuration
4. Metal mounting clip
5. Ceramic alignment sleeve for SM and MM application

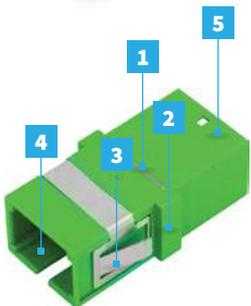

SC Premium *One-Piece*

1. Metal reinforcing element
2. Flange or flangeless configuration
3. Metal mounting clip
4. Optional shutter (outer or inner)
5. One-Piece solid body

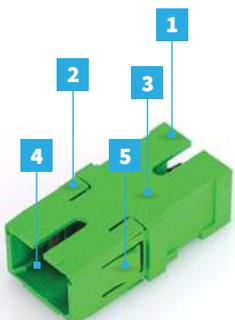

SC Premium *Super One-Piece*

1. Anti-fungus plastic
2. Anti-rattle wings
3. Super One-Piece solid body
4. Optional shutter (inner)
5. Integrated non metallic panel clip

Available colors



SM APC



SM PC/UPC



MM OM2



MM OM3



MM OM4



TRUE COLORS



METAL WINGS 2D



PLASTIC WINGS 4D

SC FIBER OPTIC ADAPTERS

SC fiber optic adapters are divided into three distinct series: Standard One-Piece, Premium One-Piece and Premium Super One-Piece, which can be characterized by various optical and mechanical parameters. SC fiber optic adapters are constructed in the “one-piece design” technology. The external housing is one solid body, thus the adapters are more durable than the typical ultrasonic welded type ones. SC fiber optic adapters are available in various options and colors. Optical and mechanical parameters as well as types of adapters are presented in the tables below.


Technical specifications

Parameter	Standard <i>One-Piece</i>	Premium <i>One-Piece</i>	Premium <i>Super One-Piece</i>
Insertion Loss (IL)	max 0.30 dB typ. 0.15 dB	max 0.20 dB typ. 0.10 dB	max 0.20 dB typ. 0.08 dB
Repeatability Δ IL/mating cycle	\pm 0.10 dB	\pm 0.08 dB	\pm 0.08 dB
Durability	500 matings/<0.20 dB typical change	1000 matings/<0.15 dB typical change	1000 matings/<0.15 dB typical change
Strength of coupling mechanism	40N	80N	80N
Operating temperature	-40 up to +85°C		
Alignment sleeve	ceramic	ceramic/metal	ceramic/metal
Mounting	metal wings	metal wings 2D	plastic wings 4D
External shutter	-	☑	-
Internal shutter	-	☑	☑
GR326 TG100 requirements	-	☑	☑
Anti-fungus plastic	-	-	☑
Colors			

Types of adapters in each series

Parameter	Standard <i>One-Piece</i>	Premium <i>One-Piece</i>	Premium <i>Super One-Piece</i>
SIMPLEX	☑	☑	☑
DUPLEX	☑	☑	☑
FLANGE	☑	☑	☑
NO FLANGE	☑	☑	☑
METAL MOUNTING CLIP	☑	☑	-
PLASTIC MOUNTING CLIP	-	-	☑
EXTERNAL SHUTTER	-	☑	-
INTERNAL SHUTTER	-	☑	☑

SC Adapters - Insertion Loss

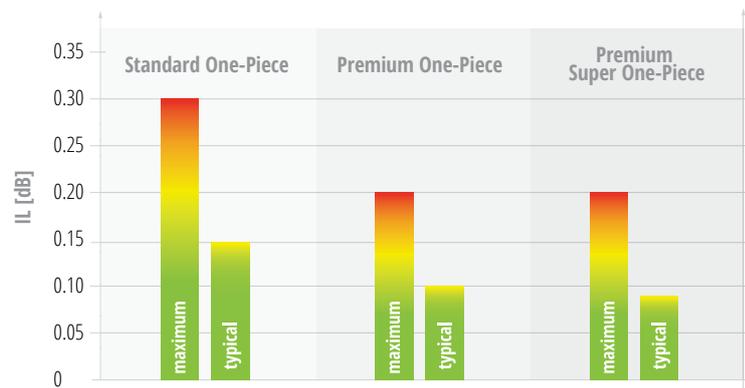

Standard *One-Piece*

The standard series of SC adapter family is available in a simplex and duplex configuration with a metal mounting clip and an optional flange. The main characteristic of Fibrain Standard One-Piece adapters is a ceramic sleeve for a single-mode and multimode application. Adapters are available in 5 colors. Adapters can be fitted with a transparent or semi-transparent dust cup.

Premium *One-Piece*

Series of SC fiber optic adapters with improved optical and mechanical performance. The external housing has been reinforced with a metal element, thus adapters exceed the IEC requirements of the strength of coupling mechanism. Adapters are available in a simplex and duplex configuration with an optional flange in 3 colors. The design has proved increased side loading performance over conventional adapters. The Premium One-Piece series can offer adapters with an external or internal shutter.

Premium *Super One-Piece*


Series of SC adapter family with the highest optical and mechanical parameters. The ‘super one-piece design’ of housing includes integrated non metallic panel clips and 4 anti-rattle wings, which significantly reduce movement when snapped into a panel. Adapters are available in a simplex and duplex configuration, in both flange and no flange version.

The Premium Super One-Piece series is constructed from anti-fungus material with the UL94-V0 flammability index. Adapters are available in 4 colors. There is also version with an inner shutter.



SC FIBER OPTIC ADAPTERS

The basic series of SC fiber optic adapters with standard optical and mechanical parameters, which comply with PN, IEC and EIA/TIA requirements. Adapters in Standard One-Piece series are available in a simplex and duplex configuration, with an optional flange. A fully ceramic alignment sleeve, for both SM and MM applications, is a unique and characteristic feature of SC adapters. Adapters are constructed as one solid body, thus the adapters are more durable than the typical ultrasonic welded type ones.

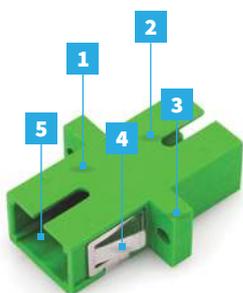


SC Standard One-Piece

1. "One-Piece Design" technology
2. Housing available in 5 colors
3. Flange or flangeless configuration
4. Metal mounting clip
5. Ceramic alignment sleeve for SM and MM application

Available colors



Available options

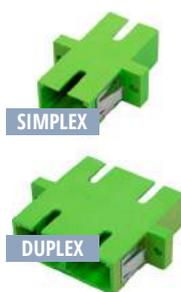


Reference scheme


Series	Adapter type	Type	Mounting	Sleeve	Housing color	Dust cover color
A101	SC	SX	1 flange	1 ceramic	1 green	3 black
	SCA	DX	2 no flange		2 blue	T transparent
					5 beige	S semi-transparent
					6 aqua	
					7 violet	

A101-SC-SX-1123 Fibrain SC PC SM adapter, SX, Standard One-Piece, with flange, ceramic sleeve, blue housing, black dust cover.


Insertion Loss

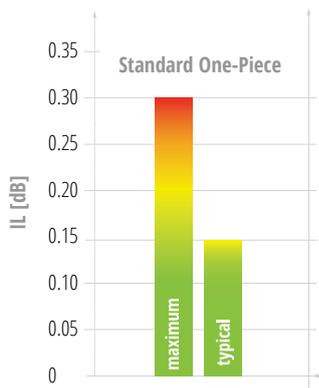

Durability

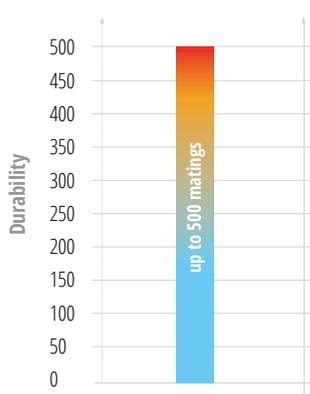

Strength of coupling mechanism

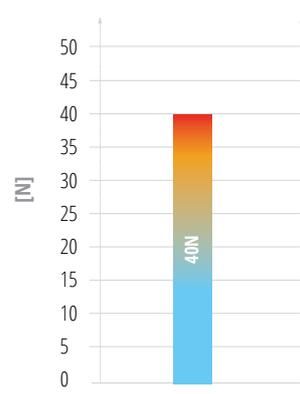

Standard One-Piece



METAL WINGS



Technical specifications

Parameter	Standard One-Piece
Insertion Loss (IL)	max. 0.30 dB typ. 0.15 dB
Repeatability Δ IL/mating cycle	\pm 0.10 dB
Durability	500 matings/<0.20 dB typical change
Strength of coupling mechanism	40N
Operating temperature	-40 do +850C
Alignment sleeve	ceramic
Mounting	metal wings
GR326 TG100 requirements	-
Anti-fungus plastic	-
Colors	


Features

- Innovative technology "One-Piece Design" – increased side loading performance,
- Equipped with a metal mounting clip,
- Possibility to choose a transparent or semi-transparent dust cover,
- High quality and durability,
- Wide range of colors - 5 colors available.

SC FIBER OPTIC ADAPTERS

The Premium One-Piece series of SC adapters with high optical and mechanical parameters, in accordance with PN, IEC and EIA/TIA standards. An external housing is constructed as one-solid body and reinforced by a metal element, thus the adapters exceed the IEC 61300-2-6 requirements for strength of the coupling mechanism. High quality, excellent optical and mechanical parameters and high repeatability are characteristic features of the series.

Adapters are available for both applications: singlemode with a ceramic alignment sleeve and multimode with a phosphor bronze alignment sleeve.

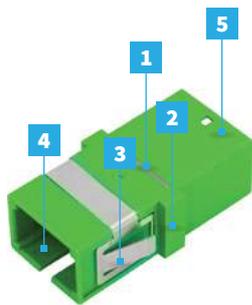


SC Premium One-Piece

1. Metal reinforcing element
2. Flange or flangeless configuration
3. Metal mounting clip
4. Optional shutter (outer or inner)
5. One-Piece solid body

Available colors



Available options

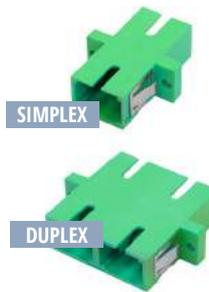


Reference scheme


Series	Adapter type	Type	Mounting	Sleeve	Housing color	Dust cover color
A120	SC	SX	1 flange	1 ceramic	1 green	3 black
	SCA	DX	2 no flange	2 metal	2 blue	
					5 beige	

A120-SC-DX-1123 Fibrain SC PC SM adapter, DX, Premium One-Piece, with flange, ceramic sleeve, blue housing, black dust cover.


Insertion Loss

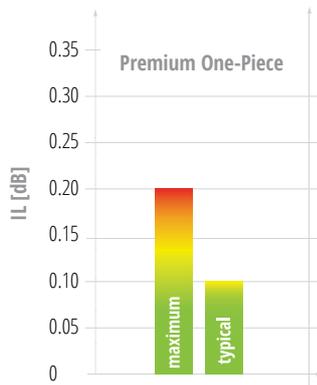

Durability

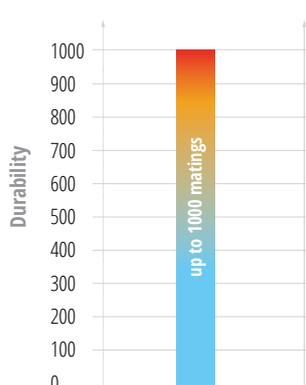

Strength of coupling mechanism

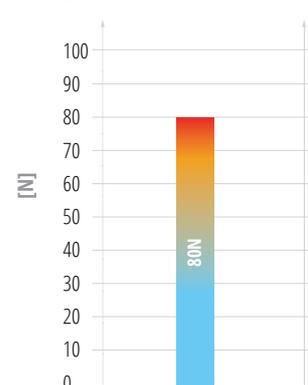

Premium One-Piece



METAL WINGS 2D



Technical specifications

Parameter	Premium One-Piece
Insertion Loss (IL)	max 0.20 dB typ. 0.10 dB
Repeatability Δ IL/mating cycle	\pm 0.08 dB
Durability	1000 matings / <0.15 dB typical change
Strength of coupling mechanism	80N
Operating temperature	-40 up to +85°C
Alignment sleeve	ceramic/metal
Mounting	metal wings 2D
GR326 TG100 requirements	●
Anti-fungus plastic	-
Colors	


Features

- Innovative technology "One-Piece Design" – increased side loading performance over conventional adapters,
- Available in a simplex or duplex version, in flange or no flange configuration,
- External body is strengthened by metal elements – the adapters exceed the IEC 61300-2-6 requirements for strength of coupling mechanism,
- Excellent optical parameters $IL_{TYPICAL}$ 0.10 dB,
- High quality,
- Equipped with a metal mounting clip – possibility of mounting without screws.

SC FIBER OPTIC ADAPTERS

Series of SC adapters family with the highest optical and mechanical parameters in accordance with PN, IEC and EIA/TIA standards. The 'Super One-Piece' technology includes integrated non metallic panel clips and 4 anti-rattle wings, which significantly reduce movement when snapped into a panel. Adapters are available in a simplex and duplex version, with an optional flange.


Adapters exceed the IEC 61200-2-6 requirements for strength of coupling mechanism. Adapters are constructed as one solid body with more durable design over the conventional, ultrasonic welded ones. Premium Super One-Piece series meets the GR326 TG100 requirements.

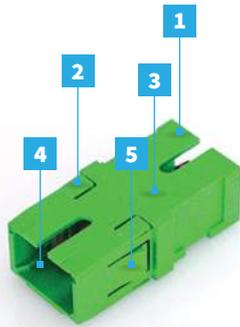


SC Premium Super One-Piece

1. Anti-fungus plastic
2. Anti-rattle wings
3. Super One-Piece solid body
4. Optional shutter (inner)
5. Integrated non metallic panel clip

Available colors

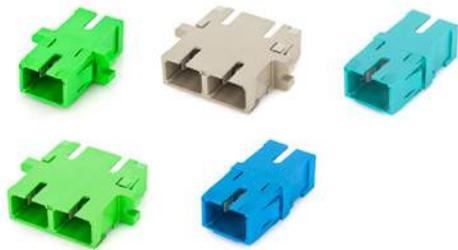

Available options

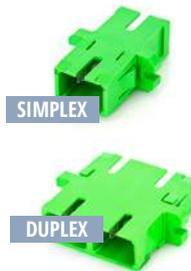


Reference scheme


Series	Adapter type	Type	Mounting	Sleeve	Housing color	Dust cover color
A123	SC	SX	1 flange	1 ceramic	1 green	3 black
					2 blue	
	SCA	DX	2 no flange	2 metal	5 beige	
					6 aqua	

A123-SCA-SX-1113 Fibrain SC APC SM adapter, SX, Premium Super One-Piece, with flange, ceramic sleeve, green housing, black dust cover.


Insertion Loss

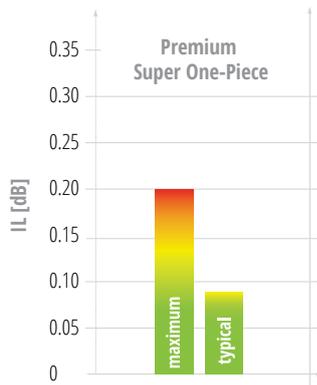

Durability

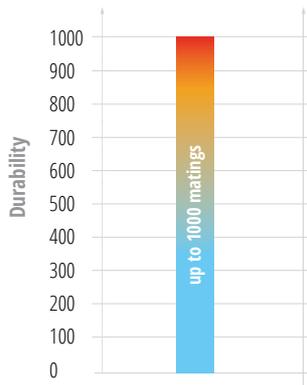

Strength of coupling mechanism

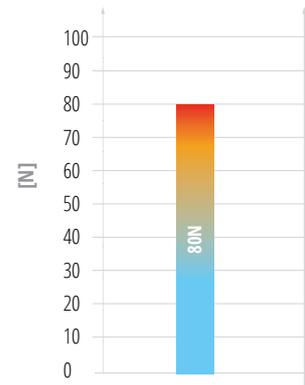

Premium Super One-Piece



PLASTIC WINGS 4D



Technical specifications

Parameter	Premium Super One-Piece
Insertion Loss (IL)	max 0.20 dB typ. 0.08 dB
Repeatability ΔIL/mating cycle	± 0.08 dB
Durability	1000 matings / <0.15 dB typical change
Strength of coupling mechanism	80N
Operating temperature	-40 up to +85°C
Alignment sleeve	ceramic/metal
Mounting	plastic wings 4D
GR326 TG100 requirements	☑
Anti-fungus plastic	☑
Colors	

Features

- Innovative technology "Super One-Piece design" provides more durable construction and increased side loading performance,
- 4 anti-rattle wings significantly reduce movement when snapped into a panel,
- Built-in panel mounting plate,
- Constructed from anti-fungus plastic with the UL94-VO flammability index,
- Typical value of Insertion Loss $IL_{TTP} \leq 0.08$ dB.

SC FIBER OPTIC ADAPTERS WITH SHUTTERS

Premium One-Piece fiber optic adapters are equipped with external or internal shutters, which guarantee protection for the eyes. Therefore, the external housing is one solid body, strengthened by a metal element. Premium One-Piece adapters with shutters are available in a simplex or duplex version, with an optional flange. Adapters for singlemode applications are equipped with a ceramic alignment sleeve and multimode with a phosphor bronze alignment sleeve.


Available colors



Reference scheme

Series	Adapter type	Type	Shutter	Mounting	Sleeve	Housing color	Dust cover color
AS20	SC	SX	1 internal	1 flange	1 ceramic	1 green	3 black
	SCA	DX	2 external	2 no flange	2 metal	2 blue 5 beige	


AS20-SCA-DX-21113 Fibrain SC APC SM adapter, DX, Premium Super One-Piece, external shutter, with flange, ceramic sleeve, green housing, black dust cover.

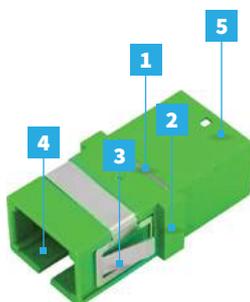


SC Premium One-Piece

1. Metal reinforcing element
2. Flange or flangeless configuration
3. Metal mounting clip
4. Optional shutter (outer or inner)
5. One-Piece solid body


Insertion Loss

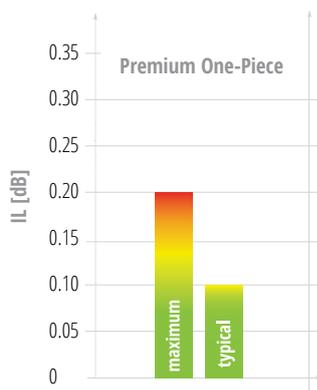

Durability

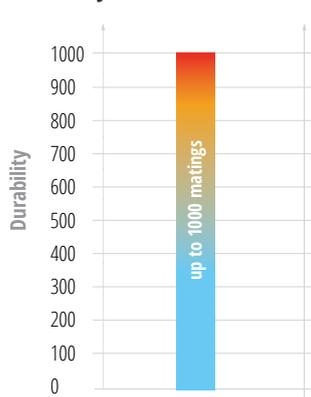

Strength of coupling mechanism

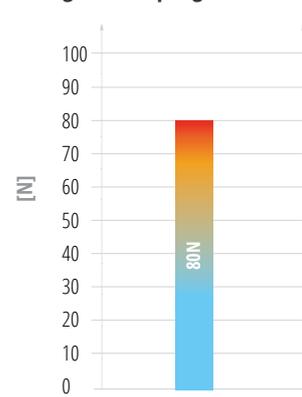

Premium One-Piece



METAL WINGS 2D



Technical specifications


Parameter	Premium One-Piece
Insertion Loss (IL)	max 0.20 dB typ. 0.10 dB
Repeatability Δ IL/mating cycle	\pm 0.08 dB
Durability	1000 matings / <0.15 dB typical change
Strength of coupling mechanism	80N
Operating temperature	-40 up to +85°C
Alignment sleeve	ceramic/metal
Mounting	metal wings 2D
External shutter	☑
Internal shutter	☑
GR326 TG100 requirements	●
Anti-fungus plastic	-
Colors	

Features

- Innovative technology "One-Piece Design" – increased side loading performance over conventional adapters,
- Available in a simplex or duplex version, in flange or no flange configuration,
- Internal or external shutter ready for eye safety,
- External body is strengthened by metal elements – the adapters exceed the IEC 61300-2-6 requirements for strength of coupling mechanism,
- Excellent optical parameters IL TYPICAL 0.10 dB,
- Equipped with a metal mounting clip – possibility of mounting without screw.

SC FIBER OPTIC ADAPTERS WITH SHUTTERS

Premium Super One-Piece fiber optic adapters are equipped with inner, metal shutters, which guarantee protection for the eyes. Adapters in the Premium Super One-Piece series are constructed as one solid body with non metallic panel clips and 4 anti-rattle wings, which protect against the movement and limit the spaces when snapped into a panel. Fiber optic adapters are designed from high quality and anti-fungus plastic with the UL94-V0 flammability index.

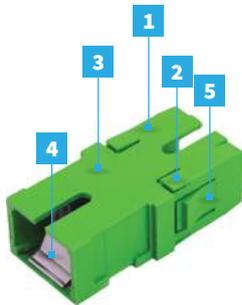


SC Premium Super One-Piece

1. Anti-fungus plastic
2. Anti-rattle wings significantly reduce movement when snapped into panel
3. 'Super One-Piece' solid body,
4. Internal shutter ready for eye safety
5. Integrated, non metallic panel clip

Available colors



Available options

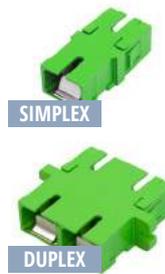


Reference scheme


Series	Adapter type	Type	Shutter	Mounting	Sleeve	Housing color	Dust cover color
AS23	SC	SX	1 internal	1 flange	1 ceramic	1 green	3 black
		DX		2 no flange	2 metal	2 blue	
						5 beige	
						6 aqua	

AS23-SCA-SX-11113 Fibrain SC APC SM adapter, SX, Premium Super One-Piece, inner shutter, with flange, ceramic sleeve, green housing, black dust cover.


Insertion Loss

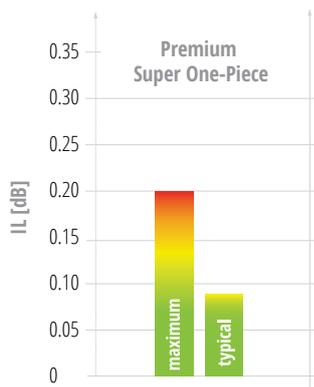

Durability

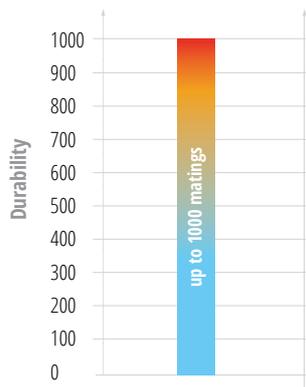

Strength of coupling mechanism

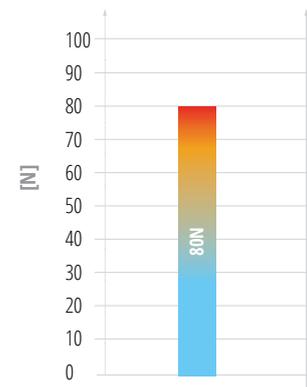

Premium Super One-Piece



PLASTIC WINGS 4D



Technical specifications

Parameter	Premium Super One-Piece
Insertion Loss (IL)	max 0.20 dB typ. 0.08 dB
Repeatability ΔIL/mating cycle	± 0.08 dB
Durability	1000 matings/<0.15 dB typical change
Strength of coupling mechanism	80N
Operating temperature	-40 up to +85°C
Alignment sleeve	ceramic/metal
Mounting	plastic wings 4D
External shutter	-
Internal shutter	☑
GR326 TG100 requirements	☑
Anti-fungus plastic	☑
Colors	

Features


- Innovative technology "Super One-Piece design" provides more durable construction and increased side loading performance,
- 4 anti-rattle wings significantly reduce movement when snapped into panel,
- Built-in a panel mounting plate,
- Constructed from anti-fungus plastic with the UL94-V0 flammability index,
- Typical value of Insertion Loss ILTYP. ≤ 0.08 dB,
- Equipped with internal, metal shutter.

LC Fiber Optic Adapters



HIGHEST QUALITY AND DURABILITY

INCREASED SIDE LOADING PERFORMANCE

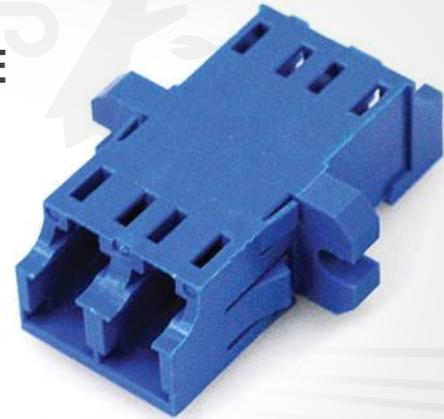


1992
WELDED PIECE

2000


2014

ONE-PIECE TECHNOLOGY

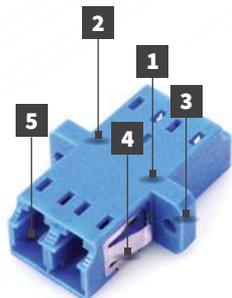


LC Standard *One-Piece*

1. "One-Piece Design" technology
2. Housing available in 5 colors
3. Optional flange
4. Metal mounting clip
5. Ceramic alignment sleeve for SM and MM application

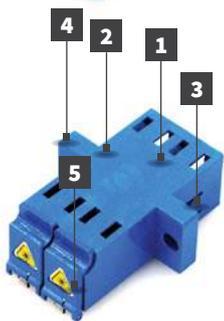

LC Premium *One-Piece*

1. One-Piece solid body
2. Housing available in 3 colors
3. Integrated non metallic panel clip
4. Optional flange
5. External or internal shutter

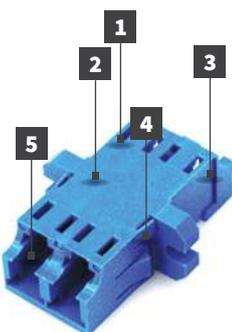

LC Premium *Super One-Piece*

1. "Super One-Piece Design" of housing
2. Anti-fungus material with the UL94-V0 flammability index
3. Housing available in 5 colors
4. Anti-rattle wings
5. Optional shutter (inner)

Available colors



SM APC



SM PC/UPC



MM OM2



MM OM3



MM OM4



PLASTIC WINGS 2D



PLASTIC WINGS 4D

LC FIBER OPTIC ADAPTERS

LC adapters are divided into three distinct series: Standard One-Piece, Premium One-Piece and Premium Super One-Piece, which can be characterized by various optical and mechanical parameters. LC fiber optic adapters are constructed in the “one-piece-design”. The external housing is one-solid body, which guarantees improved side loading performance in comparison to welded adapters. LC adapters are available in various options and colors. Optical and mechanical parameters as well as types of adapters are presented in the table below.


Technical specifications

Parameter	Standard <i>One-Piece</i>	Premium <i>One-Piece</i>	Premium <i>Super One-Piece</i>
Insertion Loss (IL)	max 0.30dB typ. 0.15dB	max 0.20 dB typ. 0.10 dB	max 0.20 dB typ. 0.08 dB
Repeatability ΔIL/mating cycle	± 0.10 dB	± 0.08 dB	± 0.08 dB
Durability	500 matings/<0.20 dB typical change	1000 matings/<0.15 dB typical change	1000 matings/<0.15 dB typical change
Strength of coupling mechanism	40N	80N	80N
Operating temperature	-40 up to +85°C		
Alignment sleeve	ceramic	ceramic/metal	ceramic/metal
Mounting	metal wings	plastic wings 2D	plastic wings 4D
External shutter	-	☑	-
Internal shutter	-	☑	☑
GR326 TG100 requirements	-	●	☑
Anti-fungus plastic	-	-	☑
Colors			

Types of adapters in each series

Parameter	Standard <i>One-Piece</i>	Premium <i>One-Piece</i>	Premium <i>Super One-Piece</i>
DUPLEX	☑	☑	☑
QUAD	☑	☑	-
FLANGE	☑	☑	☑
NO FLANGE	☑	☑	☑
METAL MOUNTING CLIP	☑	-	-
PLASTIC MOUNTING CLIP	-	☑	☑
EXTERNAL SHUTTER	-	☑	-
INTERNAL SHUTTER	-	☑	☑

LC Adapters - Insertion Loss

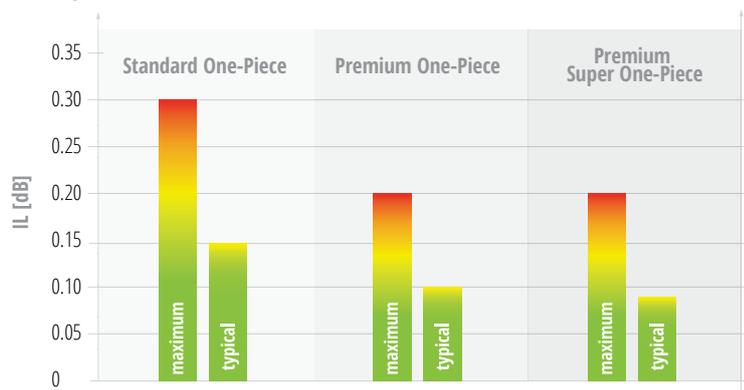

Standard *One-Piece*

The basic series of LC adapters in a duplex and quad configuration with an optional flange. A ceramic alignment sleeve, which is used in singlemode and multimode adapters, is a characteristic feature of Standard One-Piece series. Adapters are available in 5 colors with metal mounting clips. Adapters are constructed as one solid body, which provides a more durable design over the typical ultrasonic welded type ones.

Premium *One-Piece*

Series of LC fiber optic adapters equipped with external or internal shutters, which guarantee protection for the eyes. The adapters are available in a duplex or quad design, with flange or no flange configuration. The Premium One-Piece series has an integrated, non-metallic clips. Therefore, the adapters are available in 3 colors. Characteristic features of the series are excellent optical and mechanical parameters as well as high quality.

Premium *Super One-Piece*


LC Premium Super One-Piece adapters with the highest optical and mechanical parameters. The “super one-piece design” includes integrated non-metallic clips and 4 anti-rattle wings, which significantly reduce movement when snapped into a panel.

Adapters are available in 5 colors in a duplex design, with an optional flange. Therefore, the adapters are constructed from anti-fungus plastic with the UL94-V0 flammability index. The version is available with an inner shutter.



LC FIBER OPTIC ADAPTERS

The series of LC fiber optic adapters with standard optical and mechanical parameters, in accordance with PN, IEC and EIA/TIA standards. The adapters are constructed in one-piece technology, without any welded points, which guarantees more durable design and increased side loading performance. A fully ceramic sleeve, also in multimode adapters, is a characteristic feature of Standard One-Piece LC adapters. Therefore, they are equipped with a metal mounting clip providing assembly without a screw. The adapters have good optical parameters. High quality alignment sleeve guarantees repeatability of IL value as well as a stable connection.

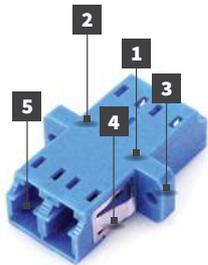


LC Standard One-Piece

1. "One-Piece Design" technology
2. Housing available in 5 colors
3. Optional flange
4. Metal mounting clip
5. Ceramic alignment sleeve for SM and MM application

Available colors



Available options

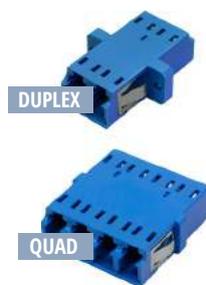


Reference scheme


Series	Adapter type	Type	Mounting	Sleeve	Housing color	Dust cover color
A001	LC	DX	1 flange	1 ceramic	1 green	8 white
	LCA	4X	2 no flange		2 blue	
					5 beige	
					6 aqua	
					7 violet	

A001-LC-DX-1128 Fibrain LC PC SM adapter, DX, Standard One-Piece, with flange, ceramic sleeve, blue housing, white dust cover.


Insertion Loss

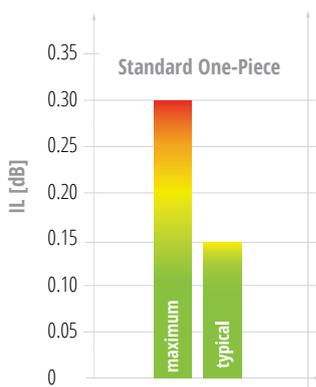

Durability

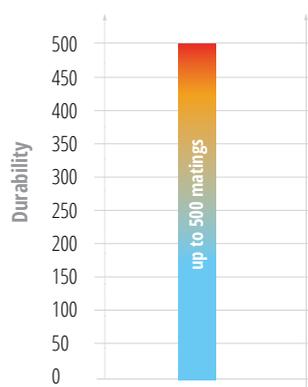

Strength of coupling mechanism

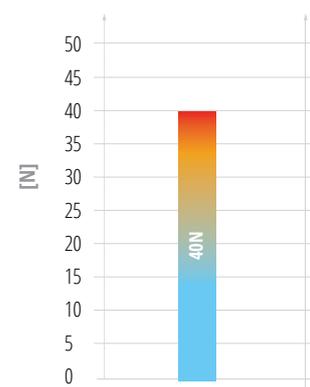

Standard One-Piece



METAL WINGS



Technical specifications


Parameter	Standard One-Piece
Insertion Loss (IL)	max 0.30 dB typ. 0.15 dB
Repeatability Δ IL/mating cycle	\pm 0.1 dB
Durability	500 matings / <math><0.20</math> dB typical change
Strength of coupling mechanism	40N
Operating temperature	-40 up to +85°C
Alignment sleeve	ceramic
Mounting	metal wings
GR326 TG100 require- ments	-
Anti-fungus plastic	-
Colors	

Features

- Housing constructed as one solid body,
- Good optical and mechanical parameters,
- Metal mounting clips providing the assembly without screws,
- Ceramic alignment sleeve for both application: singlemode as well as multimode,
- Wide color range - available in 5 colors,
- Available in a duplex and quad configuration with an optional flange.

LC FIBER OPTIC ADAPTERS

Series of LC fiber optic adapters with the highest optical and mechanical parameters, in accordance with PN, IEC and EIA/TIA standard. Adapters in the Premium Super One-Piece are designed as one solid body with integrated non-metallic mounting clips and 4 anti-rattle wings, which significantly reduce movement when snapped into a panel. Fiber optic adapters of Premium Super One-Piece series are constructed from high quality and anti-fungus materials with the UL94-V0 flammability index. Adapters are available in flange or no flange duplex configuration in 5 colors. Adapters comply with GR326 TG100 requirements.

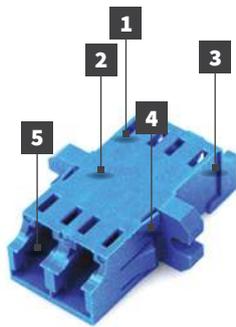


LC Premium Super One-Piece

1. "Super One-Piece Design" technology
2. Anti-fungus material with the UL94-V0 flammability index
3. Housing available in 5 colors
4. Anti-rattle wings
5. Optional shutter (inner)

Available colors



Available options



Reference scheme


Series	Adapter type	Type	Mounting	Sleeve	Housing color	Dust cover color
A031	LC	DX	1 flange	1 ceramic	1 green	8 white
	LCA		2 no flange	2 metal	2 blue	
					5 beige	
					6 aqua	
					7 violet	

A031-LCA-DX-1118 Fibrain LC APC SM adapter, DX, Premium Super One-Piece adapter, with flange, ceramic sleeve, green housing, white dust cover.


Insertion Loss



Durability

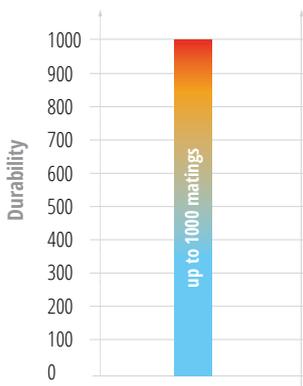

Strength of coupling mechanism

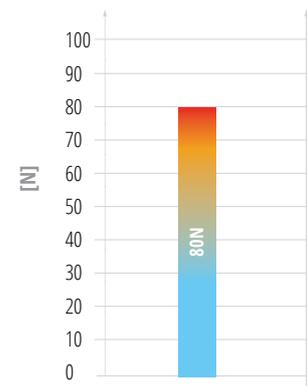

Premium Super One-Piece



PLASTIC WINGS 4D



Technical specifications

Parameter	Premium Super One-Piece
Insertion Loss (IL)	max 0.20 dB typ. 0.08 dB
Repeatability ΔIL/mating cycle	± 0.08 dB
Durability	1000 matings / <0.15 dB typical change
Strength of coupling mechanism	80N
Operating temperature	-40 up to +85°C
Alignment sleeve	ceramic/metal
Mounting	plastic wings 4D
GR326 TG100 requirements	☑
Anti-fungus plastic	☑
Colors	

Features

- Super one-piece solid body,
- Equipped with 4 anti-rattle wings limiting the spaces in the panel and protecting against movement,
- Built-in a panel clip,
- Increased side loading performance over the conventional welded type adapters,
- Exceed the IEC 61300-2-6 requirements for strength of the coupling mechanism,
- Constructed from anti-fungus plastic with the UL94-V0 flammability index,
- Excellent optical and mechanical parameters,
- Available with internal metal shutter, which guarantees protection for the eyes.

LC FIBER OPTIC ADAPTERS WITH SHUTTERS

Premium One-Piece is a series of LC adapters equipped with external or internal shutters, which guarantee protection for the eyes. Adapters are constructed as one solid body with integrated, non-metallic mounting clips. Adapters are available in a duplex and quad configuration with an optional flange in 3 colors. Adapters designed for singlemode application are equipped with a fully ceramic alignment sleeve, and the multimode adapters with a phosphor bronze sleeve. Adapters in Premium One-Piece have excellent optical and mechanical parameters.

Available colors LC adapters with inner shutters



Reference scheme

Series	Adapter type	Type	Shutter	Mounting	Sleeve	Housing color	Dust cover color
AS01	LC	DX	1 internal	1 flange	1 ceramic	1 green	8 white
	LCA	4X		2 no flange	2 metal	2 blue	
						5 beige	

AS01-LC-DX-11128 Fibrain LC PC SM adapter, DX, Premium One-Piece, internal shutter, with flange, ceramic sleeve, blue housing, white dust cover.

Available colors LC adapters with outer shutters



Reference scheme


Series	Adapter type	Type	Shutter	Mounting	Sleeve	Housing color	Dust cover color
AS02	LC	DX	2 external	1 flange	1 ceramic	1 green	8 white
	LCA	4X		2 no flange	2 metal	2 blue	
						5 beige	

AS02-LCA-DX-21118 Fibrain LC APC SM adapter, DX, Premium One-Piece, external shutter, with flange, ceramic sleeve, green housing, white dust cover.


Insertion Loss



Durability

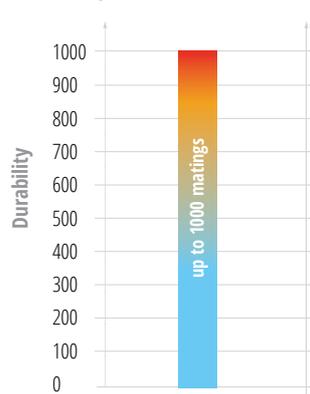

Strength of coupling mechanism

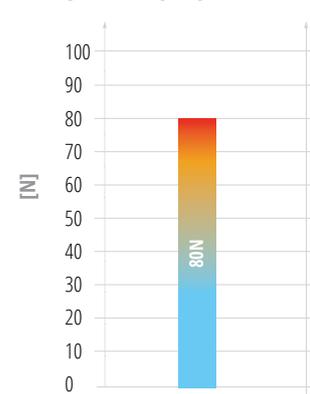

Premium One-Piece



PLASTIC WINGS 2D



Technical specifications


Parameter	Premium One-Piece
Insertion Loss (IL)	max 0.20 dB typ. 0.10 dB
Repeatability Δ IL/mating cycle	± 0.08 dB
Durability	1000 matings / <math><0.15
Strength of coupling mechanism	80N
Operating temperature	-40 up to +85°C
Alignment sleeve	ceramic/metal
Mounting	plastic wings 2D
External shutter	☑
Internal shutter	☑
GR326 TG100 requirements	●
Anti-fungus plastic	-
Colors	

Features

- Innovative technology "One-Piece Design" – increased side loading performance over conventional adapters,
- Available in a duplex and quad version, in flange or no flange configuration,
- Internal or external shutter ready for eye safety,
- Excellent optical parameters $IL_{typ} \leq 0.10$ dB,
- High quality,
- Built-in a panel mounting plate,
- Excellent optical and mechanical parameters,
- Shutters protect against laser radiation and guarantee protection for the eyes.

LC FIBER OPTIC ADAPTERS WITH SHUTTERS

Premium Super One-Piece adapters are equipped with inner, metal shutters which protect against laser radiation and guarantee protection for the eyes. Adapters in the Premium Super One-Piece are designed as one solid body with non-metallic clips and 4 anti-rattle wings, which protect against the movement and limit the spaces in a panel. Fiber optic adapters are constructed from high quality and anti-fungus materials with the UL94-V0 flammability index. The adapters are available in a duplex version with an optional flange in 5 colors. They comply with GR326 TG100, PN, IEC, EIA/TIA requirements.

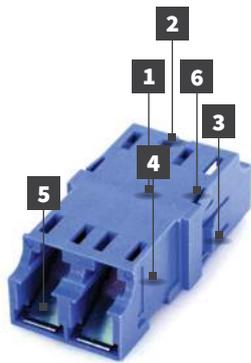

LC Premium Super One-Piece

1. "Super One-Piece Design" technology
2. Anti-fungus plastic with the UL94-V0 flammability index
3. Integrated, non-metal clips
4. Housing available in 5 colors
5. Inner metal shutter
6. Anti-rattle wings

Available colors LC Super One-Piece with shutters



Reference scheme


Series	Adapter type	Type	Shutter	Mounting	Sleeve	Housing color	Dust cover color
AS31	LC	DX	1 internal	1 flange	1 ceramic	1 green	8 white
						LCA	2 no flange
						5 beige	
						6 aqua	
						7 violet	

AS31-LCA-DX-11118 Fibrain LC APC SM adapter, DX, Premium Super One-Piece, internal shutter, with flange, ceramic sleeve, green housing, white dust cover.


Insertion Loss



Durability

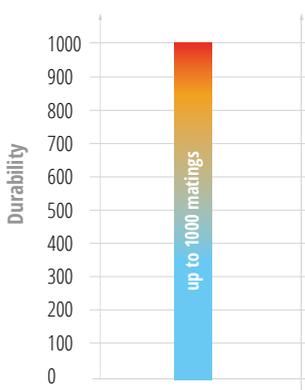

Strength of coupling mechanism

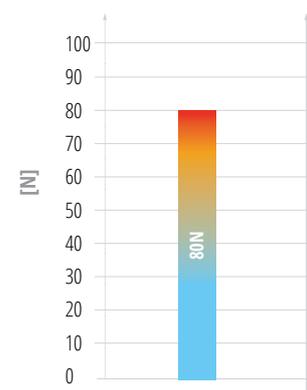

Premium Super One-Piece



PLASTIC WINGS 4D



Technical specifications

Parameter	Premium One-Piece
Insertion Loss (IL)	max 0.20 dB typ. 0.08 dB
Repeatability ΔIL/mating cycle	± 0.08 dB
Durability	1000 matings / <0.15 dB typical change
Strength of coupling mechanism	80N
Operating temperature	-40 up to +85°C
Alignment sleeve	ceramic/metal
Mounting	plastic wings 4D
External shutter	-
Internal shutter	☑
GR326 TG100 requirements	☑
Anti-fungus plastic	☑
Colors	

Features

- „Super one-piece design“ technology,
- Equipped with 4 anti-rattle wings limiting the spaces in the panel and protecting against movement,
- Integrated, non-metallic clip,
- Higher resistance to pressure,
- Excellent optical and mechanical parameters,
- Comply and exceed IEC requirements for Strength of coupling mechanism,
- Constructed from anti-fungus plastic with the UL94-V0 flammability index,
- Equipped with an inner metal shutter, which guarantees protection for the eyes.

E2000™ FIBER OPTIC ADAPTERS

Fiber optic adapters are designed to combine E2000™ connectors with a push&pull mechanism, which provides fast and stable connection, and prevents accidental disconnects. The E-2000™ adapter features injection-molded PBT housing, rated to the UL94-V0 flammability index. Spring-loaded laser protection shutters protect against dust and scratching as well as guarantee protection for the eyes. A high quality ceramic alignment sleeve ensures high performance over 1000 mating cycles. Adapters are equipped with a semi-transparent plastic dust cover, providing optical testing with test lasers without removing the cover. The adapters comply with PN/IEC 61754 and DIN/EN 186270 standards.



Available colors E2000™ Adapters



Type of E2000™ adapters


Code	Adapter type
R504511	E2000 SM PC, blue housing, flange, ceramic sleeve
R504541	E2000 SM APC, green housing, flange, ceramic sleeve
R504562	E2000 SM APC, green housing, no flange, ceramic sleeve
R508019	E2000 MM PC, black housing, flange, ceramic sleeve

Technical specifications


Parameter	E2000™ SM	E2000™ MM
Insertion Loss IL_{MAX}	0.20 dB	0.30 dB
Insertion Loss IL_{TYP}	0.10 dB	0.15 dB
Alignment sleeve	aceramic	ceramic
Durability	1000 matings	
Operating temperature	-40 up to +85°C	
Strength of coupling mechanism	70N	
Inner shutter	☑	☑

Features


- Equipped with integral self-closing metal laser protection internal shutter, which guarantees protection for the eyes and against dust,
- Excellent optical parameters,
- Mounting with the use of M2 screws or quick mounting by integrated clip (possibility of flangeless adapters),
- Constructed from highly resistant and durable PBT material with UL94-V0 flammability index,
- High quality ceramic alignment sleeve ensures high performance over 1000 mating cycles.

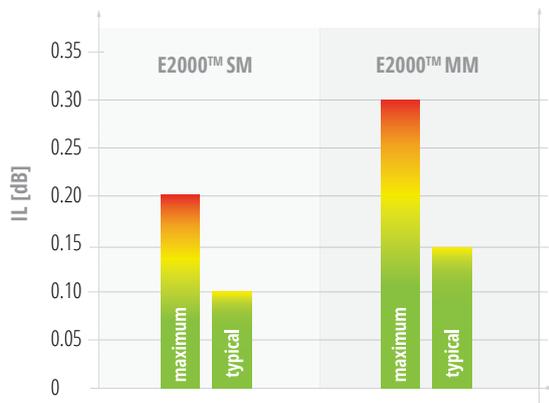

Durability

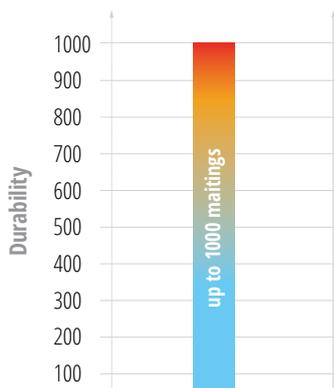

Strength of coupling mechanism

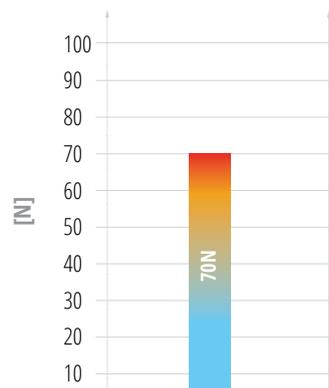

FC&ST FIBER OPTIC ADAPTERS

FC Adapters

FC connection elements are specifically designed for telecommunication elements, where stable connection is necessary and performed with the use of a thread mechanism. The FC connector is screwed in, which eliminates the possibility of an accidental disconnect. Therefore, the FC Fibrain optic fiber adapters have excellent optical and mechanical parameters as they are constructed from high quality materials. The FC adapters are designed for single- and multimode application with high quality of alignment sleeve.

FC Adapters



Reference scheme

Series	Adapter type	Type	Mounting	Sleeve	Housing color	Dust cover color
A151-Standard	FC	SX	3 d-hole	1 ceramic	0 - metal	1 green
A161-Premium	FCA			2 metal		3 black
						4 red

A151-FCA-SX-3101 Fibrain FC APC SM adapter, SX, Standard Series, d-hole mounting, ceramic sleeve, metal housing, green dust cover.

ST Adapters

ST Fibrain optic adapters are the elements of the fiber optic system, which are used to connect ST connectors using a bayonet mechanism. The ST adapters are characterized by the high quality of the external non-metal housing and alignment sleeve. Adapters are available for singlemode and multimode applications.

Adapters are precision-made items with excellent optical and mechanical parameters.

ST Adapters



Reference scheme

Series	Adapter type	Type	Mounting	Sleeve	Housing color	Dust cover color
A181-Standard	ST	SX	3 d-hole	1 ceramic	0 - metal	3 black
A191-Premium				2 metal		4 red

A181-ST-SX-3103 Fibrain ST PC SM adapter, SX, Standard Series, d-hole mounting, ceramic sleeve, metal housing, black dust cover.


Technical specifications

Parameter	Standard Series	Premium Series
Insertion Loss IL_{MAX}	0.30 dB	0.20 dB
Insertion Loss IL_{TYP}	0.15 dB	0.10 dB
Repeatability $\Delta IL/\text{mating cycle}$	± 0.10 dB	± 0.08 dB
Durability	500 matings/ <0.20 dB typical change	1000 matings/ <0.15 dB typical change
Alignment sleeve	ceramic/metal	
Operating temperature	-40 up to +85°C	
Mounting	d-hole	


Features

- Excellent optical and mechanical parameters,
- High quality,
- Thread or bayonet mount mechanism providing constant and stable connection,
- High quality ceramic sleeve for singlemode and phosphor-metal sleeve for multimode applications,
- Constructed from material resistant to corrosion.


Insertion Loss

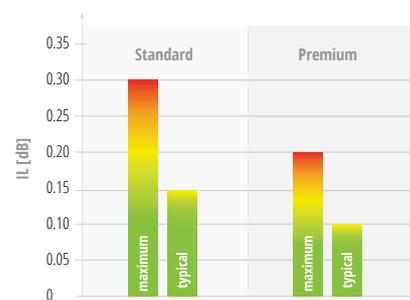

Durability

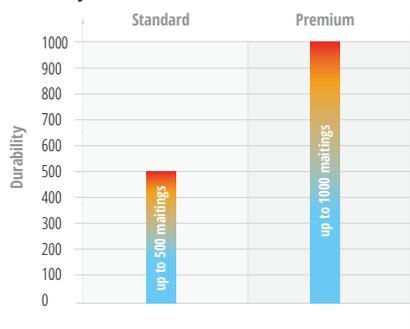

Patchcords and pigtails

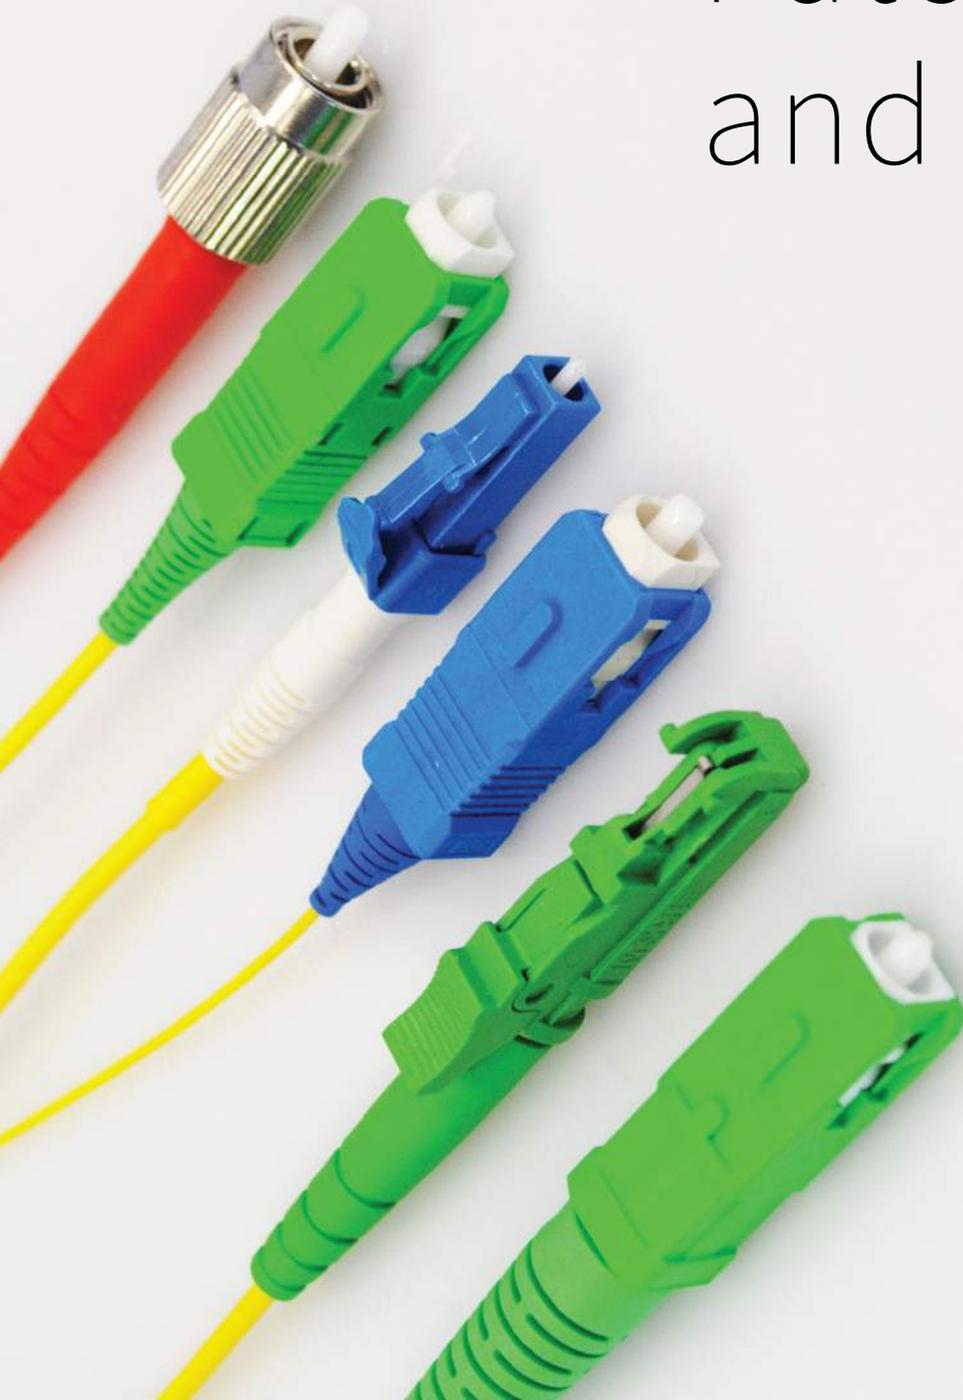

SILVER GRADE PATCHCORDS & PIGTAILS

FibraIn optical connection components are specifically designed and based on connectors, which comply with IEC/ PN-EN 61754 and IEC/PN –EN 61755. Patchcords & Pigtailes of Silver Grade are available in a singlemode and multimode configuration with various types of connectors, cables and optical fibers. Fully automated preparation and polishing process ensure the highest quality and reliability. Therefore, detailed selection of the manufacturing components ensures the highest quality of the component.

Series	Connector		Boot type	Length	Cable	Fiber	Cable diameter	Color	
	A	B							
S-Silver	SC	SC	S-standard	001.0	SX patchcord simplex	A SMF G.652D	09 0.9 mm	OR*	
	SCA	SCA			DX patchcord duplex	B SMF G655	16 1.6 mm	Y*	
	LC	LC			P9 pigtail 900 µm	C SMF G656	18 1.8 mm	GR	
	LCA	LCA			PS pigtail simplex cable	D SMF G657A1	28 2.8 mm	GY	
	FC	FC			PD pigtail duplex cable	E SMF G657A2		BL	
	FCA	FCA				F SMF G657B2		BK	
	E2	E2				G SMF G657B3		V	
	E2A	E2A				H MMF OM1		R	
	ST	ST				I MMF OM2		W	
	MU	MU				J MMF OM2+		AQ	
	DIN	DIN				K MMF OM3		BR	
		XX				L MMF OM4		P	

*Standard colors of external tube for 1.6-2.8mm cables, other colors can be ordered by a customer on request. Colors in the table concern 0.9mm tube.

S-SCA-SCA-S-002.0-SX-A-18-Y FibraIn Silver Grade Patchcord, with SC APC connectors at both side, simplex, 2m length, G.652D, 1.8 mm cable diameter, yellow coat.



Features

- Comply with IEC, TIA/EIA requirements,
- High quality and repeatability of the transmission parameters,
- Connectors are constructed from high quality plastic, resistant to corrosion and high temperatures with UL94-V0 flammability index or the high quality metal resistant to corrosion,
- Good value for money,
- Wide range of available fibers and connectors.

Applications

- Telecommunication networks,
- Local area network (LAN),
- FTTx, FTTD, FTTB, FTTH networks,
- CATV solutions,
- CWDM networks.

Available connectors for Silver Grade patchcords and pigtailes:

- SC PC/APC,
- FC PC/APC,
- E2000 PC/APC,
- LC PC/APC,
- ST PC,
- DIN,
- MU.

Available fibers:

- G652D,
- G655,
- G657A,
- G657B,
- 50/125 OM2,
- 50/125 OM2+,
- 50/125 OM3/OM4,
- 62.5/125 OM1

Technical specifications

Parameter	Connectors		
	SM PC	SM APC	MM PC
Insertion Loss IL_{MAX} against MASTER Acc. IEC 61300-3-4	≤ 0.35 dB	≤ 0.35 dB	≤ 0.35 dB
Insertion Loss IL_{TYP} against MASTER Acc. IEC 61300-3-4	≤ 0.28 dB	≤ 0.28 dB	≤ 0.25 dB
Return Loss Acc. IEC 61300-3-6	≥ 50 dB	≥ 60 dB	≥ 30 dB

GOLD GRADE PATCHCORDS & PIGTAILS

Fibrain optical components are specifically designed and based on connectors, which comply with IEC/PN-EN 61754 and IEC/PN –EN 61755 requirements. Patchcords & Pigtailes of Gold Grade are available in singlemode and multimode option with various type of connectors, cables and optical fibers. Fully automated preparation and polishing process ensure the highest quality and reliability. Therefore, detailed selection of the manufacturing components ensures the highest quality of the product. Patchcords & Pigtailes of Gold Grade are available with 3 different designs of boots, which protect the bend radius of the optical fibers. Apart from standard boots, there are mini and flexi-angle available. The boot in the mini option limits the total length of a connector and boot, whereas the flexi-angle boot is designed to bend in a 0-90° angle range. Available options of the boots are given in the table below. There is no possibility to mix various types of boots on a patchcord- as from the both sides a patchcord is terminated with the same type of boots.

Series	Connector		Boot type	Length	Cable	Fiber	Cable diameter	Color	
	A	B							
G-Gold	SC	SC	S-Standard	001.0	SX patchcord simplex	A SMF G.652D	09 0.9 mm	OR*	
	SCA	SCA	M-Mini		DX patchcord duplex	B SMF G655	16 1.6 mm	Y*	
	LC	LC	F-Flex-angled		P9 pigtail 900 µm	C SMF G656	18 1.8 mm	GR	
	LCA	LCA			PS pigtail simplex cable	D SMF G657A1	28 2.8 mm	GY	
	FC	FC			PD pigtail duplex cable	E SMF G657A2		BL	
	FCA	FCA				F SMF G657B2		BK	
	E2	E2				G SMF 657B3		V	
	E2A	E2A				H MMF OM1		R	
	ST	ST				I MMF OM2		W	
	MU	MU				J MMF OM2+		AQ	
	DIN	DIN				K MMF OM3		BR	
			XX			L MMF OM4		P	

*Standard colors of external tube for 1.6-2.8mm cables, other colors can be ordered by a customer on request. Colors in the table concern 0.9mm tube.

G-SCA-SCA-S-002.0-SX-A-18-Y Fibrain Gold Grade Patchcord, with SC APC connectors at both side, simplex, 2m length, G.652D, 1.8 mm cable diameter, yellow coat.

Available boots

Parameter	Boot type**		
	Standard boots 0.9/2.0/3.0 mm	Mini boots 0.9/2.0/3.0 mm	Flex-Angled boots 2.0/3.0 mm
SC PC	☑	☑	☑
SC APC	☑	☑	☑
LC PC	☑	☑	☑
LC APC	☑	☑	☑
FC PC	☑	☑	-
FC APC	☑	☑	-
ST PC	☑	☑	-
E2000 PC	☑	-	-
E2000 APC	☑	-	-
DIN	☑	-	-
MU	☑	-	-

**There is no possibility to mix various type of boots on a patchcord- as from the both sides a patchcord is terminated with the same type of boots.



Features

- Comply with IEC, TIA/EIA requirements,
- High quality and repeatability of the transmission parameters,
- Connectors are constructed from high quality plastic, resistant to corrosion and high temperatures with UL94-V0 flammability index or the high quality metal resistant to corrosion,
- Good value for money,
- Wide range of available connectors and optical fibers.

Applications

- Telecommunication networks,
- Local area network (LAN),
- FTTx, FTTD, FTTB, FTTH networks,
- CATV solutions,
- CWDM networks.

Technical specifications

Parameter	Connectors		
	SM PC	SM APC	MM PC
Insertion Loss IL _{MAX} against MASTER Acc. IEC 61300-3-4	≤ 0.17 dB	≤ 0.20 dB	≤ 0.20 dB
Insertion Loss IL _{TYP} against MASTER Acc. IEC 61300-3-4	≤ 0.15 dB	≤ 0.16 dB	≤ 0.12 dB
Return Loss Acc. IEC 61300-3-6	≥ 55 dB	≥ 65 dB	≥ 35 dB

TITANIUM GRADE PATCHCORDS & PIGTAILS


Fibrain Titanium series of patchcords and pigtails is intended for the most demanding customers. High optical parameters, premium quality and precise selection of the components are the characteristic features of the Titanium Grade. Fibrain optical components are specifically designed and based on connectors, which comply with IEC/ PN-EN 61754 and IEC/PN –EN 61755 requirements. Patchcords and pigtails of Titanium Grade are available in singlemode option with various type of connectors, cables and optical fibers. Fully automated preparation and polishing process ensure the highest quality and reliability. Therefore, detailed selection of the manufacturing components ensures the highest quality of the final component.

Patchcords and pigtails of Titanium Grade are available 3 different designs of boots, which protect a bend radius of the optical fibers. Apart from standard boots there are mini and flexi-angles available. The boot in the mini option limits the total length of a connector and boot, whereas the flexi-angle boot is designed to bend in a 0-90° angle range. Available options of the boots are given in the table below. There is no possibility to mix various type of boots on a patchcord- as from the both sides a patchcord is terminated with the same type of boots.

Series	Connector		Boot type	Length	Cable	Fiber	Cable diameter	Color	
	A	B							
T-Titanium	SC	SC	S-Standard	001.0	SX patchcord simplex	A SMF G.652D	09 0.9 mm	OR*	
	SCA	SCA	M-Mini		DX patchcord duplex	B SMF G655	16 1.6 mm	Y*	
	LC	LC	F-Flex-angled		P9 pigtail 900 μm	C SMF G656	18 1.8 mm	GR	
	LCA	LCA			PS pigtail simplex cable	D SMF G657A1	24 2.4 mm	GY	
	FC	FC			PD pigtail duplex cable	E SMF G657A2	28 2.8 mm	BL	
	FCA	FCA				F SMF G657B2		BK	
	E2	E2				G SMF 657B3		V	
	E2A	E2A						R	
		XX						W	
								AQ	
							BR		
							P		

*Standard colors of a tube for 1.6-2.8 mm cables, other colors available on customer's request. The rest of colors concern a 0.9 mm tube.

T-SCA-SCA-S-002.0-SX-D-28-Y Fibrain Titanium Grade Patchcord, with SC APC connectors at both side, simplex, 2m length, G.657A1, 2.8 mm cable diameter, yellow coat.

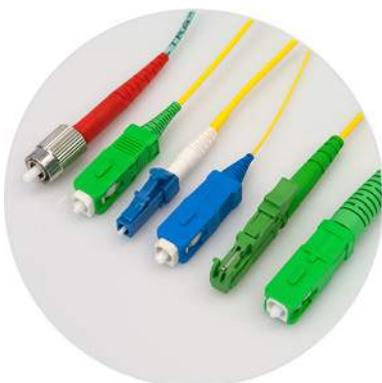

Features

- Comply with IEC, TIA/EIA requirements,
- High quality and repeatability of the transmission parameters,
- Connectors are constructed from high quality plastic, resistant to corrosion and high temperatures with flammability index UL94-V0 or the high quality metal resistant to corrosion,
- Good value for money,
- High quality ceramic ferrules,
- Low attenuation and high reflectance,
- Wide range of available connectors and optical fibers.

Applications

- Telecommunication networks,
- Local area network (LAN),
- FTtx, FTTD, FTTB, FTTN networks,
- CATV solutions,
- CWDM networks,
- Low voltage networks,
- Measuring devices.

Technical specifications

Parameter	SM PC Connectors	SM APC Connectors
Insertion Loss IL_{MAX} against MASTER Acc. IEC 61300-3-4	≤ 0.12 dB	≤ 0.15 dB
Insertion Loss IL_{TYP} against MASTER Acc. IEC 61300-3-4	≤ 0.10 dB	≤ 0.12 dB
Return Loss Acc. IEC 61300-3-6	≥ 55 dB	≥ 65 dB

TITANIUM GRADE PATCHCORDS & PIGTAILS

Available boots

Parameter	Boot type**		
	Standard boots 0.9/2.0/3.0 mm	Mini boots 0.9/2.0/3.0 mm	Flex-Angled boots 2.0/3.0 mm
SC PC	☑	☑	☑
SC APC	☑	☑	☑
LC PC	☑	☑	☑
LC APC	☑	☑	☑
FC PC	☑	☑	-
FC APC	☑	☑	-
ST PC	☑	☑	-
E2000 PC	☑	-	-
E2000 APC	☑	-	-
DIN	☑	-	-
MU	☑	-	-

** There is no possibility to mix various type of boots on a patchcord- as from the both sides a patchcord is terminated with the same type of boots.

Available boots types



Available connectors for Titanium Grade patchcords and pigtails:

- SC PC/APC,
- FC PC/APC,
- E2000 PC/APC,
- LC PC/APC,

Available fibers:

- G652D,
- G655,
- G657A,
- G657B.

Detailed interferometric reports containing ferrule end face geometry parameters can be obtained by customer on request.

Features

- Comply with IEC, TIA/EIA requirements,
- High quality and repeatability of the transmission parameters,
- Connectors are constructed from high quality plastics, resistant to corrosion and high temperatures with flammability index UL94-V0 or the high quality metal resistant to corrosion,
- Good value for money,
- High quality ceramic ferrules,
- Low attenuation and high reflectance,
- Wide range of available connectors and optical fibers.

Applications

- Telecommunication networks,
- Local area network (LAN),
- FTTx, FTTD, FTTB, FTTH networks,
- CATV solutions,
- CWDM networks,
- Low voltage networks,
- Measuring devices.

Technical specifications

Parameter	SM PC Connectors	SM APC Connectors
Insertion Loss IL_{MAX} against MASTER Acc. IEC 61300-3-4	≤ 0.12 dB	≤ 0.15 dB
Insertion Loss IL_{TYP} against MASTER Acc. IEC 61300-3-4	≤ 0.10 dB	≤ 0.12 dB
Return Loss Acc. IEC 61300-3-6	≥ 55 dB	≥ 65 dB

MASTER CLASS PATCHCORDS

Master Class fiber optic patchcords are specifically designed to measure and test telecommunication networks and optical elements. The Master Patchcord is equipped with the highest quality master connector of tightly controlled concentricity and bore angle as well as the end face geometric parameters, which determine very low Insertion Loss and high connection repeatability.

Optical measurements, in accordance with PN-EN 61280-4-2/-4-1, PN-ISO/IEC 14763-3, ITU-T G.650.3 require the use of the Master Class patchcord. Patchcords can be terminated with two connectors of Master Class or a mixed option: a connector of the Master Class - a standard connector, polished of the Gold Grade. Fibrain Master Class of fiber optic connectors can be characterized by very low Insertion Loss and increased control of the ferrule's and face geometry. The control over the end face geometry after polishing process of a fiber optic termination provides the following benefits: guarantees optical performance, minimizes IL, and minimizes back reflection.

Series	Connector A		Connector B		Length [m]	Cable	Fiber	Diameter	Color		
	Class	Type	Class	Type							
MP	M Master	SC	M Master*	SC	001.0	SX patchcord simplex	A SMF G.652D	18 1.8mm	Y	■	
		SCA	G Gold	SCA							D G657A1
		LC		LC							
		LCA		LCA							
		FC		FC							
		FCA		FCA							
				E2							
				E2A							
				ST							
				MU							
		DIN									

* Master Connectors in accordance with the table of availability

MP-MSCA-MSCA-002.0-SX-A-18-Y Fibrain Master Class Patchcord, with SC APC Master class Connectors at both side, simplex, 2m length, G.652D, cable diameter 1.8mm, yellow coat.



Features

- Comply with IEC, TIA/EIA requirements,
- High quality and repeatability of the transmission parameters,
- High quality ceramic ferrules with tightly controlled concentricity and bore angle,
- Very low IL value, $IL_{typ} \leq 0.05$ dB,
- Connectors are constructed from high quality plastic, resistant to corrosion and high temperatures with UL94-V0 flammability index.

Applications

- Measurements concerning telecommunication networks,
- Testing optical devices,
- Measuring equipment,
- CWDM networks
- Local area network (LAN),
- FTtx, FTTD, FTTB, FTTH networks,
- CATV solutions.

Technical specifications

Parameter	SM PC Connectors	SM APC Connectors
Insertion Loss ^{MAX} Acc. IEC 61300-3-34	≤ 0.10 dB	≤ 0.10 dB
Insertion Loss ^{97%} Acc. IEC 61300-3-34	≤ 0.07 dB	≤ 0.07 dB
Insertion Loss ^{MEAN} Acc. IEC 61300-3-34	≤ 0.05 dB	≤ 0.05 dB
Return Loss Acc. IEC 61300-3-6	≥ 55 dB	≥ 65 dB

Master Connector End Face Geometry


Parameter	SM PC Connectors	SM APC Connectors
Concentricity	≤ 0.30 μ m	≤ 0.30 μ m
Bore angle	≤ 0.20 degree	≤ 0.20 degree
Apex Offset (AO)	≤ 30 μ m	≤ 30 μ m
Radius of Curvature (ROC)	$10 \leq ROC \leq 20$ mm @ SC	$7 \leq ROC \leq 12$ mm
	$7 \leq ROC \leq 25$ mm @ LC	
Fiber Height (FH)	$-30.0 \leq FH \leq +30.0$ nm	$-30.0 \leq FH \leq +30.0$ nm
Angle (AN)	-	$7.7 \leq AN \leq 8.3$ degree

MASTER CLASS PATCHCORDS & PIGTAILS

Available connectors

Connector type	Master Class	Gold Grade
SC PC	☑	☑
SC APC	☑	☑
LC PC	☑	☑
LC APC	☑	☑
FC PC	☑	☑
FC APC	☑	☑
ST PC	-	☑
E2000 PC	-	☑
E2000 APC	-	☑
DIN	-	☑
MU	-	☑

Detailed reports containing test results with individual measurements of Insertion Loss (IL) and Return Loss (RL) as well as end face geometry are attached with Master Class Patchcords.

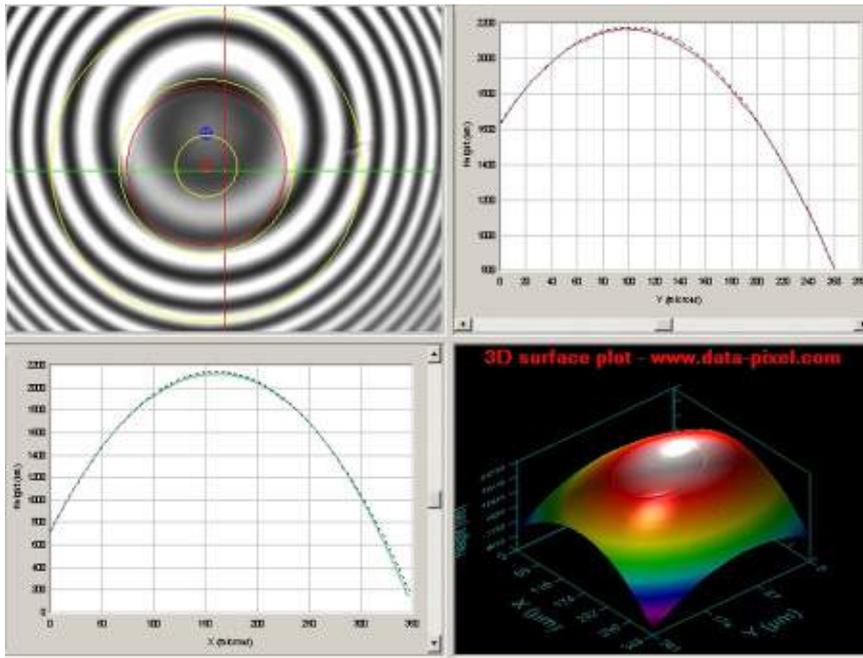

Features

- Comply with IEC, TIA/EIA requirements,
- High quality and repeatability of the transmission parameters,
- High quality ceramic ferrules with tightly controlled concentricity and bore angle,
- Very low IL value, $IL_{TP} \leq 0.05$ dB,
- Connectors are constructed from high quality plastic, resistant to corrosion and high temperatures with UL94-V0 flammability index.

Applications

- Measurements concerning telecommunication networks,
- Testing optical devices,
- Measuring equipment,
- CWDM networks
- Local area network (LAN),
- FTTx, FTTD, FTTB, FTTH networks,
- CATV solutions.

Technical specifications

Parameter	SM PC Connectors	SM APC Connectors
Insertion Loss ^{MAX} Acc. IEC 61300-3-34	≤ 0.10 dB	≤ 0.10 dB
Insertion Loss ^{97%} Acc. IEC 61300-3-34	≤ 0.07 dB	≤ 0.07 dB
Insertion Loss ^{MEAN} Acc. IEC 61300-3-34	≤ 0.05 dB	≤ 0.05 dB
Return Loss Acc. IEC 61300-3-6	≥ 55 dB	≥ 65 dB

Master Connector End Face Geometry

Parameter	SM PC Connectors	SM APC Connectors
Concentricity	≤ 0.30 μm	≤ 0.30 μm
Bore angle	≤ 0.20 degree	≤ 0.20 degree
Apex Offset (AO)	≤ 30 μm	≤ 30 μm
Radius of Curvature (ROC)	10 ≤ ROC ≤ 20 mm @ SC 7 ≤ ROC ≤ 25 mm @ LC	7 ≤ ROC ≤ 12 mm
Fiber Height (FH)	-30.0 ≤ FH ≤ +30.0 nm	-30.0 ≤ FH ≤ +30.0 nm
Angle (AN)	-	7.7 ≤ AN ≤ 8.3 degree

PIGTAIL SET PATCHCORDS & PIGTAILS

The set of 12 fiber optic pigtailed polished in the Silver grade. This set is available in two versions: 12 pigtailed in yellow protection tube 0.9mm or a set of 12 pigtailed with multicolor 0.9mm protection tubes. The set of pigtailed facilitates the assembly and identification of fiber optic splices, which saves installation time and lower the costs substantially. The tubes are available in the following colors: red, green, blue, yellow, white, grey, brown, purple, orange, black, pink, aqua.

The set of 12 Fibrain fiber optic pigtailed with a standard 900 µm colorful protection tube.

The sets are delivered with tubes in 12 colors:

Available colors of tubes											
											
red	green	blue	yellow	white	grey	brown	violet	orange	black	pink	aqua

Series	Connector		Boot type	Length	Cable	Fiber	Cable diameter	Color	
	A	B							
S-SET12	SC	XX	S-Standard	001.0	P9 pigtail 900 µm	A SMF G.652D	09 0.9 mm	12 multicolor	
	SCA							I MMF OM2	
	LC								
	LCA								
	FC								
	FCA								
	E2								
	E2A								
	ST								

S-SET12-SCA-XX-S-002.0-P9-A-09-12 Fibrain Pigtail Silver, SET 12 pieces, SC APC connector, G.652D, 2m length, 0.9mm tube in 12 colors.


The set of 12 Fibrain fiber optic pigtailed with a standard 900 µm yellow protection tube

Series	Connector		Boot type	Length	Cable	Fiber	Cable diameter	Color	
	A	B							
S-SET12	SC	XX	S-Standard	001.0	P9 pigtail 900 µm	A SMF G.652D	09 0.9 mm	Y	
	SCA								
	LC								
	LCA								
	FC								
	FCA								
	E2								
	E2A								
	ST								

S-SET12-SCA-XX-S-002.0-P9-A-09-Y Fibrain Pigtail Silver, SET 12 pieces, SC APC connector, G.652D, 2m length, 0.9mm yellow tube.


Technical specifications

Parameter	Connectors		
	SM PC	SM APC	MM PC
Insertion Loss IL_{MAX} against Master Acc. IEC 61300-3-4	≤ 0.35 dB	≤ 0.35 dB	≤ 0.35 dB
Insertion Loss IL_{TYP} against Master Acc. IEC 61300-3-4	≤ 0.28 dB	≤ 0.28 dB	≤ 0.25 dB
Return Loss Acc. IEC 61300-3-6	≥ 50 dB	≥ 60 dB	≥ 30 dB

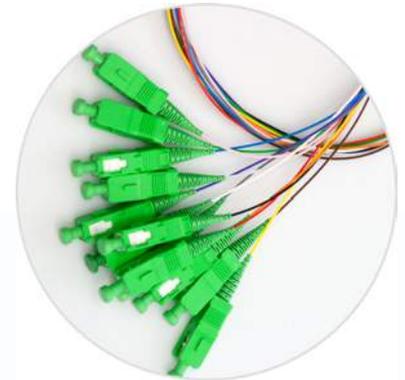

NEW

Cross-connect drop cables

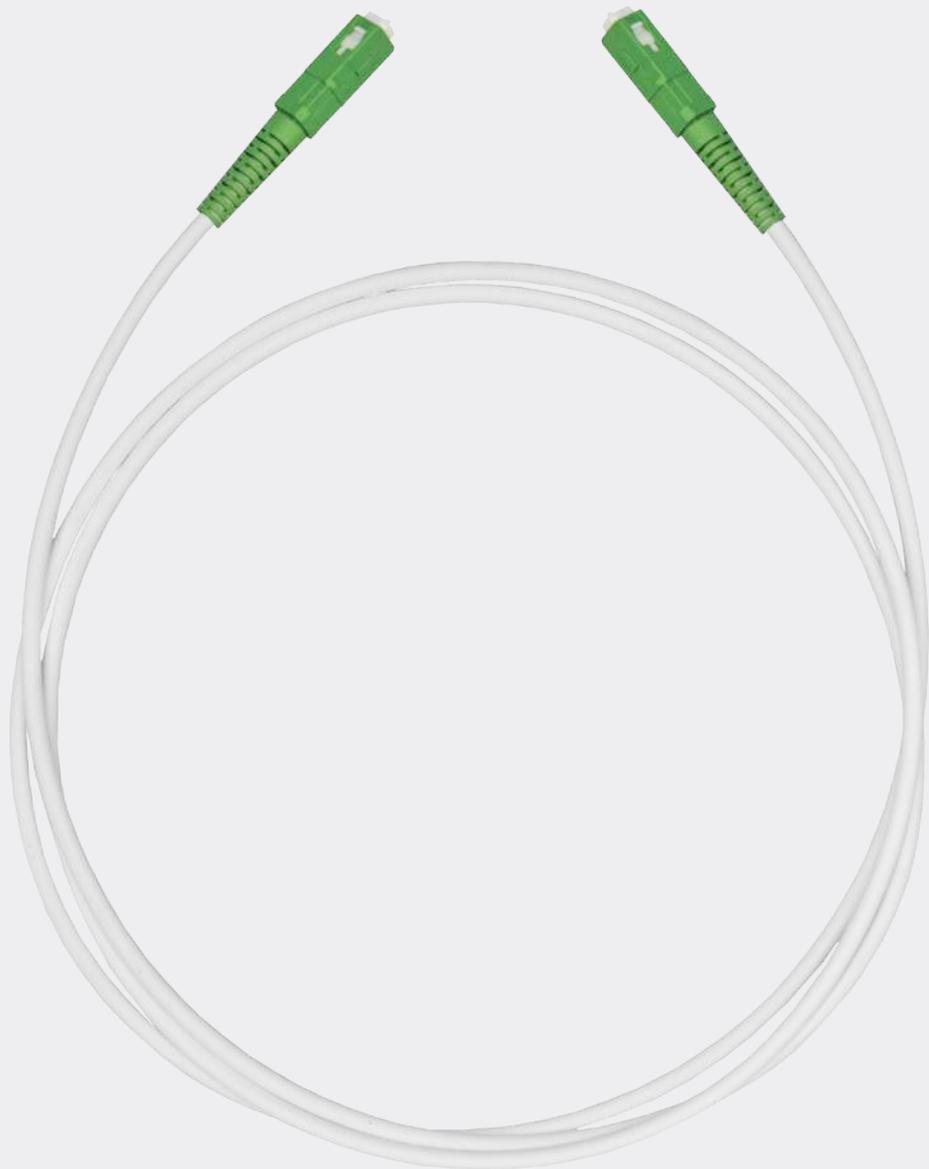

NEW

CROSS-CONNECT DROP CABLES

Drop cable patchcords and pigtails are specifically designed to be used in FTTH networks, between a customer outlet and an ONT equipment. Fibrain patchcords are strengthened, thus they are resistant to mechanical damages, contrary to ordinary patchcords. Therefore, each cable is constructed from flame-retardant materials, which do not emit any poisonous substances and toxic smoke (LSOH). Depending on a number of terminated fibers and a cable, the connector is clamped directly on the cable's sheath or performed as a short fanout. There are different constructions, fibers, and fiber optic connectors available. Accurate and precise manufacturing process, detailed quality control process, interferometric measurements as well as the control of IL and RL parameters make our patchcords and pigtails reliable components of fiber optic networks.



Technical specification	
Cable	VC-D20, VC-D30, VC-D30R, VC-D30RP, VC-D40, VC-DCY
Fiber	G.657A1, G.657A2, G.657A3/B2, G.657B3
Fiber optic connector	SC/SCA/LC/LCA/FC/FCA/E2000/E2000 APC
IL_{MAX} (61300-3-4)	≤ 0.20 dB
IL_{TYP} (61300-3-4)	≤ 0.15 dB
RL (61300-3-6)	≥ 55 dB @ PC / ≥ 65 dB @ APC

Ordering information

Type*	Connectors side A		Connectors side B		Length [m]	Cable type	Fiber type	Fiber qty in a cable
	qty	type	qty	type				
PA0	01	SC	01	SC	001.0	01 VC-D20	A G.652D	1 - 1F
PA1	02	SCA	02	SCA		02 VC-D30	D G.657A1	2 - 2F
PA2	04	LC	04	LC		03 VC-D30R (Resibend)	E G.657A2	4 - 4F
PA3		LCA		LCA		04 VC-D30RP	F G.657A3/B2	
		FC		FC		(Resibend Plus)	G G.657B3	
		FCA		FCA		05 VC-D40		
		E2		E2		06 VC-DCY		
		E2A		E2A		07 VC-DCS		

* **PA0** – drop patchcord without fanout, connectors terminated directly on a cable
PA1 – drop patchcord with 0.9 mm fanout

PA2 – drop patchcord with 1.8 mm fanout
PA3 – drop patchcord with 2.8 mm fanout


Example: PA0-01SCA-01SCA-001.0-03F-1 Fibrain VC-D30 Resibend drop patchcord cable with single LSOH 1m 1J 09/125 coat, G.657A3/B2 SC APC/ SC APC

Construction

For **VC-D20, VC-D30, VC-D30R, VC-D30RP, VC-DCS, VC-D40** cables terminated with a single fiber optic connectors on both sides:



For **VC-DCS 2F, VC-D40 2F** cables (in case of terminating both fibers with connectors), **VC-DCY 1-4F**:

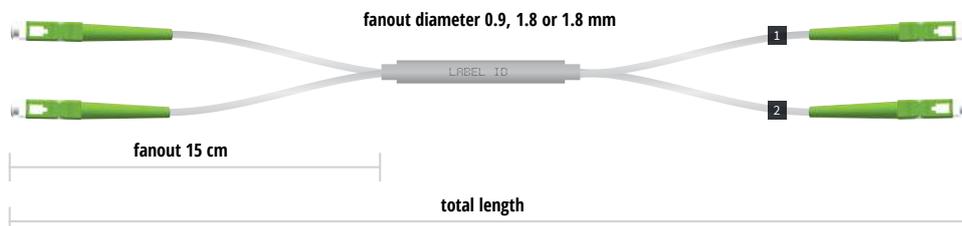



Features

- In accordance with IEC, TIA/EIA
- High quality and repeatability of transmission parameters
- High quality plastic connectors, corrosion and high temperatures resistant, UL 94-V0 material or other metal resistant to corrosion
- 300-1000N bending resistant (depending on a cable type)
- Wide range of connectors and optical fibers.
- Safe and proper to be used in houses and office buildings between a customer outlet and ONT

Applications

- FTTH networks
- Last mile connections

NEW

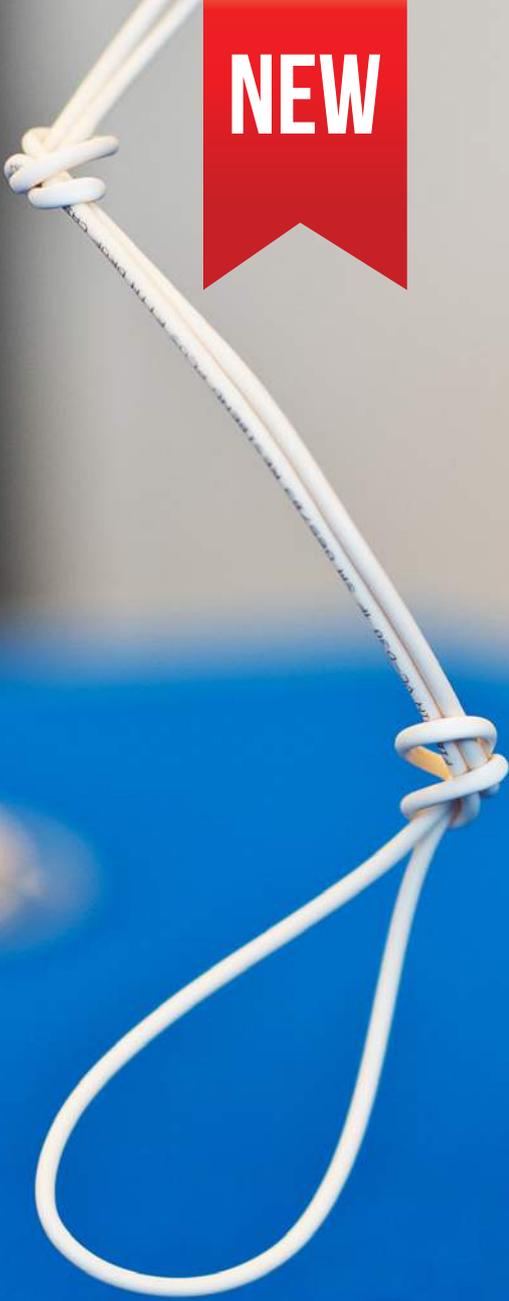

Crushproof



Bendproof



Knotproof




RESIBEND[®] CABLES

NEW



MTP[®]/MPO
solution

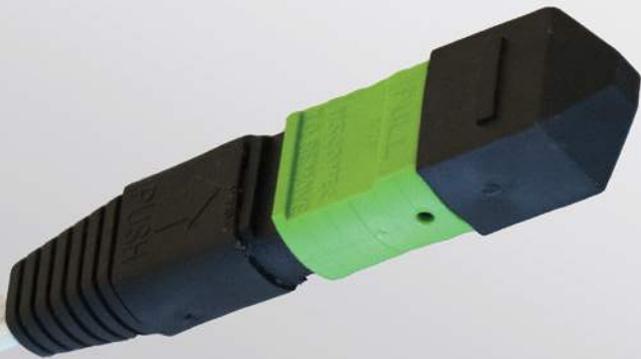

MTP® Fiber Optic Adapters



**ONE-PIECE
TECHNOLOGY**

- ✓ Adapters provide quick connection of MTP®/MPO connectors – connection integrity is provided by adapter latches which are locked into place on the connectors by a spring loaded sliding mechanism
- ✓ One-piece design of adapter body – increased side loading performance
- ✓ Available in black, aqua, beige, violet magenta and green
- ✓ Flange or flangeless configuration
- ✓ Opposed key orientation - TIA 604-5D (on request aligned key orientation in gray housing color)
- ✓ Standard MTP footprint type (on request MTP adapters in SC footprint type available)

**HIGH DENSITY
APPLICATION**

❖ Applications

- Data Center Systems
- Array trunk cabling
- Dense interconnect for data center and telecommunication system
- Chassis-to-chassis connections
- Structured cabling per TIA-568-C

📏 Features

- Low insertion loss
- Meets IEC Standard 61754-7
- Meets TIA/EIA 604-5 Type MPO
- Push-pull mechanism provides quick connections

Available colors



SM APC



MM OM1



MM OM2



MM OM3



MM OM4



Ordering information

- AD-MTP-SM-GR-F** FIBRAIN MTP SM adapter, flange, green housing, opposed key
- AD-MTP-OM1-BG-F** FIBRAIN MTP OM1 adapter, flange, beige housing, opposed key
- AD-MTP-OM2-BK-F** FIBRAIN MTP OM2 adapter, flange, black housing, opposed key
- AD-MTP-OM3-AQ-F** FIBRAIN MTP OM3 adapter, flange, aqua housing, opposed key
- AD-MTP-OM4-V-F** FIBRAIN MTP OM4 adapter, flange, violet housing, opposed key

MTP[®]

PERFECT SOLUTION

FOR DATA CENTER APPLICATION


Low insertion loss


Removable housing


Compatible with conventional MPO connectors


Meets IEC standard 61754-7


Meets TIA/EIA 604-5 Type MPO


24x the density of standard single-fiber connector


Female or male configuration


High density application

NEW

**HIGH DENSITY
APPLICATION**



NEW

MTP® Trunk cables

- ✓ 12 or 24 fibers in one connector
- ✓ Designed for SM and MM application
- ✓ Small diameter of ruggedized round cables
 - 12F → Ø 3.0 mm cable diameter
 - 24F → Ø 3.5 mm cable diameter
- ✓ Provide quick connection for up to 24 optical fiber
- ✓ Color coded housings available to differentiate fiber type
- ✓ Removable housing for quick gender change
- ✓ Female and male configuration available
- ✓ Polarization version A, B or C
- ✓ Alignment achieved with high precision guide pins with elliptical shape to minimize ferrule debris
- ✓ Low insertion loss
- ✓ 100% optical measurements
- ✓ 100% interferometric measurements
- ✓ Ideal solution for high fiber count, multi-row applications in array trunking, breakout modules

HIGH DENSITY APPLICATION

Available colors of connector housing



MTP® Fanouts – Direct Split

- ✓ This solution combine MTP® multi-fiber connectors with standard, single-fiber optic connectors
- ✓ Fanouting is made directly in the MTP® connector – without any additional furcation point
- ✓ Designed for SM and MM application, typically used in a 3U modular patch panel
- ✓ Wide range of single-fiber optic connectors, for example: LC, SC, E2000 with PC or APC polishing type
- ✓ Provide compact, cost effective solution for multi-fiber which require the MTP® hardware to be integrated with single-fiber connector assemblies
- ✓ Female or male configuration of MTP® connectors
- ✓ Low insertion loss
- ✓ Good value for money, the best price-quality ratio
- ✓ Different type of optical fiber available (G.652D, G.657, OM1, OM2, OM3 or OM4)

MTP® TRUNK/CONNECTING CABLES




Fiber optic patchcords terminated with MTP® connectors are specifically designed for Data Center system. MTP® connectors, using the MT ferrule, can increase the density of 4 to 72x compared to traditional, single-fiber optic connectors. MTP® patchcords and pigtails are specifically designed to be used in both single- and multimode transmission. Modern and repeatable production process, detailed quality control, interferometric as well as IL & RL parameters control measurement make Fibrain patchcords and pigtails reliable elements of tracks and fiber optic networks. Connecting elements terminated with MTP® connectors are popular and willingly used solution for Data Center cabling, backbone networks and local broadcast of bandwidth 40/100 Gb /s bandwidth.




FIBER IDENTIFICATION AND POLARIZATION CLASSIFICATION:


Polarization A

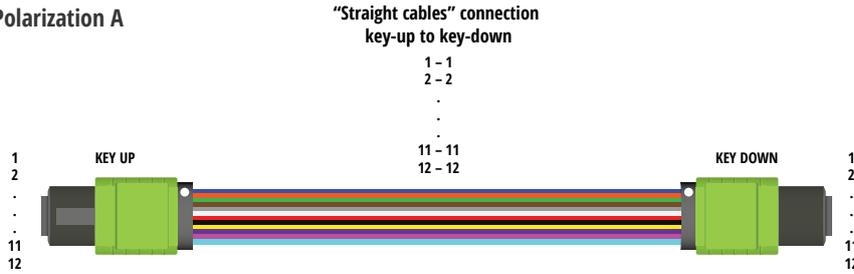

Polarization B

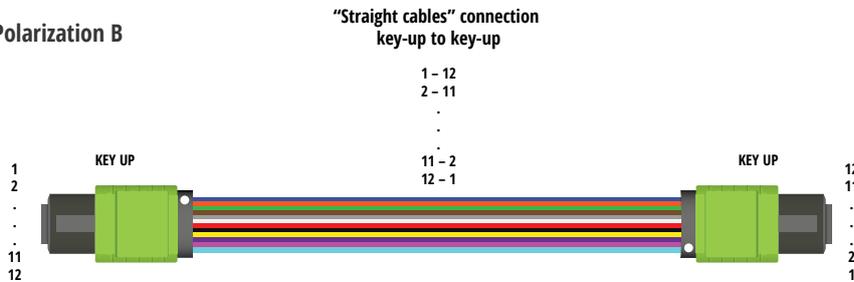

Polarization C

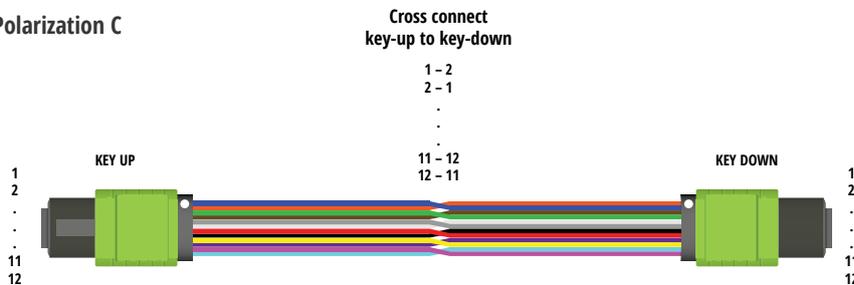

Technical specifications

Parameter	MTP APC SM	MM PC
Max. Insertion Loss IL _{MAX} Acc. IEC 61300-3-4	≤ 0.40 dB	≤ 0.40 dB
Typical Insertion Loss IL _{TYP} Acc. IEC 61300-3-4	≤ 0.20 dB	≤ 0.20 dB
Return Loss RL Acc. IEC 61300-3-6	≥ 65 dB	≥ 35 dB

Ordering information

Class	Fiber qty	Connector		Boot type	Cable diameter	Length [m]	Cable type	Fiber type	Polarization
		A	B						
G-Gold	12-12	MTPA.F – MTP female APC	MTPA.F – MTP female APC	S - standard	R30 – round 3.0 mm	001.0	1 – DC PRIM	A – G652D	A
		MTPA.M – MTP male APC	MTPA.M – MTP male APC					D – G657A1	B
		MTP.F – MTP female	MTP.F – MTP female					E – G657A2	C
		MTP.M – MTP male	MTP.M – MTP male					H – OM1	
								I – OM2	
								K – OM3	
								L – OM4	

Features

- In accordance with IEC 61754-7, TIA/EIA 568-C,
- High quality and repeatability of transmission parameters,
- Connectors made of high quality plastics,
- MTP connectors compatible with MPO connectors,
- Good value for money, the best price-quality,
- High quality MT ferrule provides placing a lot of optical fibers in one connector.

Applications

- Telecommunication networks,
- Data Center SYSTEMS,
- FTTx, FTTD, FTTB, FTTH networks

NEW

MTP® FANOUTS DIRECT SPLIT

Fibrain MTP® Fanouts of Direct Split type connect MTP® multi-fiber connectors with standard, single-fiber optical connectors. This solution is specifically designed to be used in singlemode and multimode transmission. Therefore, in our product portfolio, there is a wide range of fiber optic connectors. The side terminated with MTP® connectors includes male or female connectors- depending on customer's needs.



TECHNICAL SPECIFICATIONS

Multi-fiber MTP connectors

Parameter	MTP APC SM	MM PC
Max. Insertion Loss IL_{MAX} Acc. IEC 61300-3-4	≤ 0.40 dB	≤ 0.40 dB
Typical Insertion Loss IL_{TYP} Acc. IEC 61300-3-4	≤ 0.20 dB	≤ 0.20 dB
Return Loss RL Acc. IEC 61300-3-6	≥ 65 dB	≥ 35 dB

Single-fiber standard optical connectors

Parameter (connectors)	SM PC	SM APC	MM
Max. Insertion Loss IL_{MAX} Acc. IEC 61300-3-4	≤ 0.17 dB	≤ 0.20 dB	≤ 0.20 dB
Typical Insertion Loss IL_{TYP} Acc. IEC 61300-3-4	≤ 0.15 dB	≤ 0.16 dB	≤ 0.12 dB
Return Loss RL Acc. IEC 61300-3-6	≥ 55 dB	≥ 65 dB	≥ 35 dB

Fiber identification - fiber color (outer transparent tube)

1-12	1	2	3	4	5	6	7	8	9	10	11	12
Code	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Pink	Aqua
Color	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	aqua

Ordering information

Class	Fiber qty	Connector		Boot type	Cable diameter	Length [m]	Cable type	Fiber
		A	B					
G-Gold	12-12	MTPA.F – MTP female APC	SC	S -standard	09 - 900µm	001.0	DS – Direct Split	A – G652D
		MTPA.M – MTP male APC	SCA					D – G657A1
		MTP.F – MTP female	LC					E – G657A2
		MTP.M – MTP male	LCA					H – OM1
			FC					I – OM2
			FCA					K – OM3
			E2					L – OM4
								E2A

HIGH DENSITY APPLICATION


Features

- In accordance with IEC, TIA/EIA standards ,
- High quality and repeatability of transmission parameters,
- Connectors made of high quality plastics,
- Good value for money, the best price-quality ratio,
- High quality MT ferrule, provides placing a lot optical fibers in one connector.

Applications

- Telecommunication networks,
- Data Center SYSTEMS,
- FTTx, FTTD, FTTB, FTTN networks

Pre-connectorized multi-fiber cables

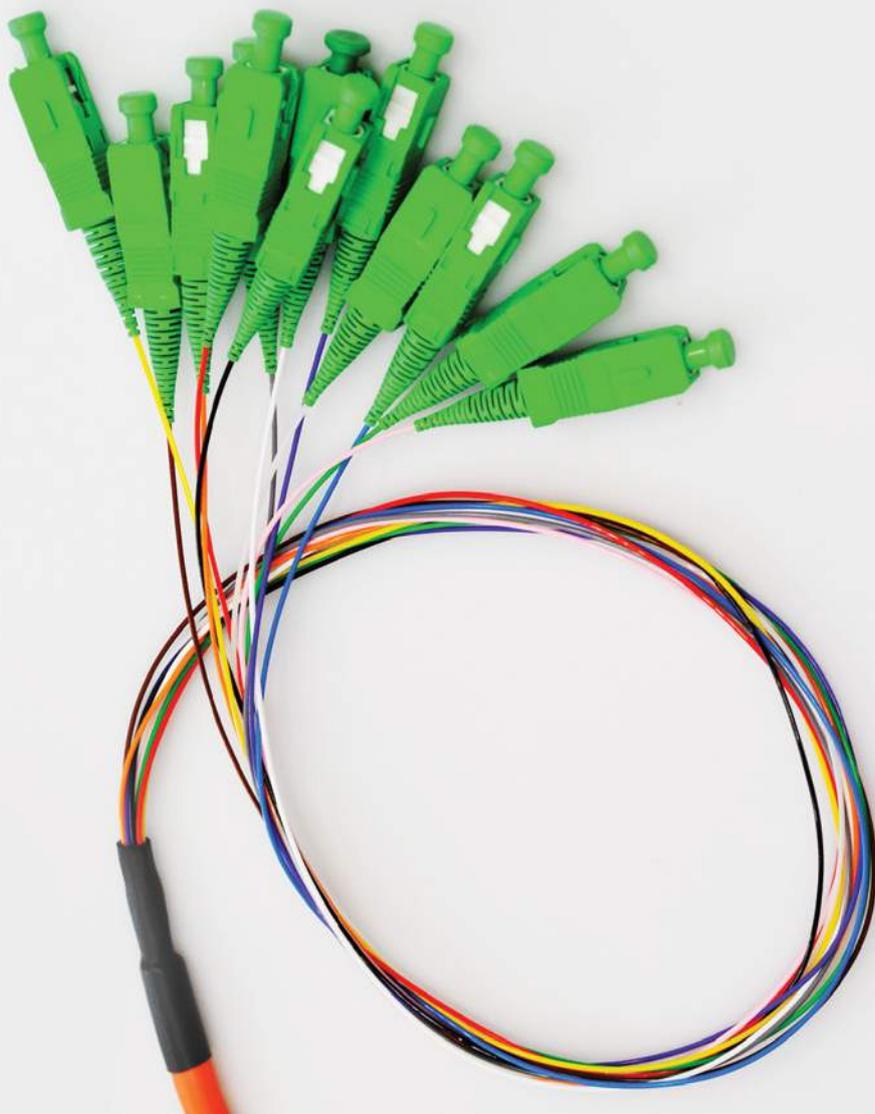

PRE-CONNECTORIZED MULTI-FIBER CABLES /MULTIPATCHCORDS

Pre-connectorized multi-fiber cables referred to as multipatchcords are ideal solution for fast and easy connection of N fibers with single cable. Therefore, no extra and expensive equipment is necessary to perform the fiber optic splices. Additional benefits are given in the “Features” section.

The cables producers put a lot of effort into meeting all demanding, mechanical and environmental requirements, but even the advanced cable construction may not guarantee the proper transmission, if the fanout and connectorization are performed improperly. It may only seem that stripping the jacket, fibers separation and placing protection tubes is easy, but in reality, it often causes difficulties. Thus, Fibrain company pays special attention to design the products with premium quality parameters. The product range, which is being constantly widened, is based on mechanical and climate tests in climatic chamber and strict regulations concerning manufacturing and quality. As a result, Fibrain multipatchcords comply and often exceed the IEC requirements, Telcord and telecommunication operator’s specifications. As an example, pre-connectorized cables of Safe-branch series have the high mechanical and thermic resistance, and therefore can be used in FTTH applications.

Available furcations

Cable	Furcation						
	TCF	TEF	TEFM	TEFM9	TEFC9	PTF	HF
Aero AD	-	✓	-	-	✓	-	-
Aero AS	-	✓	-	-	✓	-	-
Aero DF	-	✓	-	-	-	-	-
BDC CO	✓	✓	-	-	✓	-	-
BDC CI	✓	✓	-	-	✓	-	-
BDC S0	✓	✓	-	-	✓	✓	-
BDC SC	✓	✓	✓	✓	✓	✓	-
BDC SI	✓	✓	-	-	✓	-	-
DAC	✓	✓	✓	✓	✓	-	-
DDC-C0	✓	✓	-	-	✓	-	-
DDC-C0A	✓	✓	-	-	✓	-	-
EXO-C0	✓	✓	✓	✓	✓	✓	-
EXO-CI	✓	✓	✓	✓	✓	✓	-
EXO-CK	✓	✓	✓	✓	✓	✓	-
EXO-CS	✓	✓	✓	✓	✓	✓	-
EXO-CU	✓	✓	✓	✓	✓	✓	-
MK-DX	-	-	✓	✓	✓	-	-
MK-LX4	✓	✓	✓	✓	✓	-	-
MK-LX6	✓	✓	✓	✓	✓	-	-
MK-LX7	✓	✓	-	✓	✓	-	-
MK-LX8	✓	✓	-	✓	✓	-	-
CDIR-M	✓	✓	-	✓	-	-	✓
CDI	✓	✓	✓	✓	✓	✓	✓
CDI-M	✓	✓	✓	✓	✓	✓	✓
CDAD	✓	✓	-	-	✓	✓	✓
CDG	✓	✓	✓	✓	✓	✓	✓

Features

- Time-saving solution and proper protection of connections - for pulling Easylink2,
- Producer’s warranty for connectors,
- Reduced use of space,
- Possibility to order a cable of selected length,
- Room saving in telecommunication cabinets,
- No mistakes in performing splices.

Legend:

- outdoor
- outdoor/indoor
- indoor
- ✓ - possible
- ✓ - recommended

HF MULTIPATCHCORDS

Pre-connectorized multi-fiber cables Minibreakout&Breakout

HF pre-connectorized multi-fiber cables are specifically designed to serve as general-purpose products. The solution is based on breakout or minibreakout cable solutions, protected by heatshrink sleeves. Then, fibers with 0.9mm diameter buffer tubes or in kevlar reinforced fanouts (diameter: 1.6mm-2.8mm, depending on a cable type) are terminated with connectors in accordance with customer's needs and requirements. Each connector is easily identified thanks to clear color coding of tubes and numerical markings.

In addition, from an economic point of view HF cables provide cost-effective solutions, thus they are popular in the structured cabling systems, where are used as links between distribution points. It is a Plug and Play solution, which facilitates fast and easy installation, with no extra equipment, as in traditional installation with splices.



Mechanical and environmental characteristics

Parameter	Standard	
Max.tensile load	IEC 61753-2-1	80N-fanout 1.6 mm/2.8 mm 7N-tuba 900 µm
Crush resistance- furcation point	EN 187101, IEC 60794-1-2-E3, no attenuation increase	50N
Temperature range for installation	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-10... +50 [°C]
Operation	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-30... +70 [°C]
Transport & Storage		-30... +70 [°C]
Max. Insertion Loss of connector	IEC 61300-3-4	≤ 0.3dB
Return Loss	IEC 61300-3-6	RL≥65 dB(APC); RL≥50 dB(SM UPC); RL≥30 dB(MM PC)

Parameter	
Furcation point length [mm]	40-60
Number of fibers	1-72*
Connector type	SC/SCA/E2/E2A/LC/ LCA/FC/FCA/ST

*Temperature range varies from the cable type.

* There is a possibility of performing pre-connectorized cables with more fibers after the consultancy with our sales department.

Reference scheme

Furcation	Number and connector type (A side)	Number and connector type (B side)	Cable/fiber type	Total length [m]	Furcation (A side)	Furcation (B side)
HF	-12SCA	-12SCA	-01A <ul style="list-style-type: none"> Two digits: cable type Letter: fiber type 	-0100	-01200 <ul style="list-style-type: none"> First digit - Furcation type of A side; Three following digits - max. output length on A side [cm] Last digit - diameter of A side 	-01200 <ul style="list-style-type: none"> First digit - furcation type of A side Three following digits - max. output length on B side [cm] Last digit - diameter of B side

Available connectors	Available cables	Fiber type
0400 - furcation without connectors	17-MINI-CDIR	A SMF G.652D
0000 - no furcation	18-CDIR	B SMF G655
SC-SC UPC	25-CDI-M	C SMF G656
SCA-SC APC	27-CDI	D SMF G657A1
E2-E2000	33-CDAD	E SMF G657A2
E2A-E2000 APC	26-CDIR-AD	F SMF G657B2
LC-LC UPC	36-CDG	G SMF G657B3
LCA-LC APC	37-CDIR-M	H MMF OM1
FC-FC UPC		I MMF OM2
FCA-FC APC		J MMF OM2+
ST-ST UPC		K MMF OM3
		L MMF OM4

Furcation type:	Fanout type:
0-equal length of outputs	0-tube 900 µm
1-single cascade	1-fanout 1.8 mm
2-double cascade	2-fanout 2.8 mm

Maximal outputs length in a standard configuration: 200 cm, minimal: 10 cm; for other outputs length please contact with our sales department.

Available cascades
Singe cascade - each furcation leg is shorter by 3cm than a previous one
Double cascade - Pair of furcation legs is shorter by 3cm than a previous one

Example:

HF-12SCA-12SCA-51A-0100-01200-01200

CDI pre-connectorized cable with G.652D fibers, 100 m length with 12 SC APC connectors on both sides of 900 µm tubes. Equal length of furcation legs - 120 cm.

TCF EASYLINK 1 MULTIPATCHCORDS

Pre-connectorized multi-fiber cables Easylink 1

Easylink 1 pre-connectorized multi-fiber cables are specifically designed to serve as general-purpose products. The solution provides termination of loose tube cables as well as other cable types. The fibers are inserted into 0.9mm tube or fanouts, strengthened by Kevlar fibers, with 1.6mm or 2.8mm (depending on a cable type). Therefore, the furcation point is protected by a heatshrink sleeve. Then, fibers are terminated with connectors in accordance with customer's needs and requirements.

In addition, from an economic point of view TCF cables provide cost-effective solutions, thus are popular in the structured cabling systems, where they are used as links between distribution points. It is a Plug and Play solution, which facilitates fast and easy installation, with no extra equipment, as in traditional installation with splices.

Mechanical and environmental characteristics

Parameter	Standard	
Max. tensile load	IEC 61753-2-1	80N-fanout 1.6mm/2.8mm 7N-tuba 900µm
Crush performance	EN 187101, IEC 60794-1-2-E3, no attenuation increase	100N
Installation temperature range	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-10... +50 [°C]
Operation*	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-30... +70 [°C]
Transport & Storage	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-30... +70 [°C]
Max. Insertion Loss	IEC 61300-3-4	≤ 0.3dB
Return Loss (RL)	IEC 61300-3-6	RL≥65 dB(APC); RL≥50 dB(SM UPC); RL≥30 dB(MM PC)

*Temperature range varies from the cable type.

Technical specification

Parameter					
Max. outer diameter of furcation point [mm]	Ø 15	Ø 18	Ø 22*	Ø 24*	Ø 27*
Length of furcation point [mm]	55	65	65	70	80
Number of fibers in 0.9mm tubes	4-48	49-96**			
Number of fibers in 1.8 mm fanouts	4-16	17-32	33-48	49-60	61-96**
Number of fibers in 2.8mm fanouts	4-10	11-18	19-26	27-32	33-48**
Connector type	SC/SCA/E2/E2A/LC/LCA/FC/FCA/ST				

*Ø 22 - Ø 27 adapted to 1.8 - 2.8mm fanouts

** There is a possibility of performing pre-connectorized cables with more fibers after consulting with our sales department.



Features

- Furcation point is protected by plastic tube and a heatshrink sleeve,
- High quality,
- Easy and fast installation,
- Plug & Play solution,
- Common in structured cable systems,
- Wide range of fiber optic connectors.



TCF EASYLINK 1 MULTIPATCHCORDS

Pre-connectorized multi-fiber cables Easylink 1

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
TCF	-12SCA	-12SCA	-01A <ul style="list-style-type: none"> Two digits: Cable type Letter: Fiber type 	-0100	-01201 <ul style="list-style-type: none"> First digit - Furcation type of A side; Three following digits - max. output length on A side [cm] Last digit -fanout diameter of A side; 	-11200 <ul style="list-style-type: none"> First digit - Furcation type of B side; Three following digits - max. output length on B side [cm] Last digit -fanout diameter of B side;

Available connectors	Available cables	Fiber type
0400-furcation without connectors	01-EXO-CO PE	A SMF G.652D
0000-no furcation	02-EXO-CO LSZH	B SMF G655
SC-SC UPC	03-EXO-CI PE	C SMF G656
SCA-SC APC	04-EXO-CI LSZH	D SMF G657A1
E2-E2000	05-BDC-CO PE	E SMF G657A2
E2A-E2000 APC	06-BDC-CO LSZH	F SMF G657B2
LC-LC UPC	07-BDC-CI PE	G SMF G657B3
LCA-LC APC	08-BDC-CI LSZH	H MMF OM1
FC-FC UPC	24-BURRY DAC	I MMF OM2
FCA-FC APC	28-AERO DF 03	J MMF OM2+
ST-ST UPC	35-FTTA DAC	K MMF OM3
		L MMF OM4

Furcation type	Fanout type
0-equal length of outputs	0-tube 900 µm
1-single cascade	1-fanout 1.8 mm
2-double cascade	2-fanout 2.8 mm

Maximal outputs length in a standard configuration: 200 cm, minimal: 10 cm; for other outputs length please contact with our sales department.

Available cascades
Singe cascade - each furcation leg is shorter by 3 cm than a previous one
Double cascade - Pair of furcation legs is shorter by 3 cm than a previous one

Example:

TCF-12SCA-12SCA-01A-0100-01201-11200 EXO CO PE pre-connectorized cable with G.652D fibers, 100 m length with 12 SC APC connectors on both sides, equal length of 1.8 mm furcation legs on A side - 120 cm, single cascade on 900 mm tubes for B side, maximal output length of B side 120 cm, Easylink 1.

TCF Easylink 1



PTF EASYLINK 2 MULTIPATCHCORDS

PTF-Easylink 2 pre-connectorized multi-fiber cables

Easylink 2 pre-connectorized multi-fiber cables are specifically designed to serve as general-purpose products. The solution provides termination of loose tube cables as well as other cable types. The fibers are inserted into 0.9mm tube or furcation, strengthened by Kevlar fibers, with 1.6mm or 2.8mm (depending on a cable type). Therefore, the furcation point is protected by a metal sleeve with a boot protecting from moving and bending. Then, fibers are terminated with connectors in accordance with customer's needs and requirements. Moreover, output legs are placed inside a reusable protection tube, which is fixed to a bushing and may be used as a pulling grip.

In addition, from an economic point of view PTF-Easylink2 cables provide cost-effective solutions, thus they are popular in the structured cabling systems, where they are used as links between distribution points. It is a Plug and Play solution, which facilitates fast and easy installation, with no extra equipment, as in traditional installation with splices.

Mechanical and environmental characteristics

Parameter	Standard	
Max. tensile load	IEC 61753-2-1	100N
Crush performance	EN 187101, IEC 60794-1-2-E3, no attenuation increase	1000N
Installation temperature range	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-10... +50 [°C]
Operation	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-30... +70 [°C]
Transport & Storage		-30... +70 [°C]
Max. Insertion Loss	IEC 61300-3-4	≤ 0.3dB
Return Loss (RL)	IEC 61300-3-6	RL≥65 dB(APC); RL≥50 dB(SM UPC); RL≥30 dB(MM PC)

* Temperature range varies from the cable type.

Technical specification

Parameter		
Max. outer diameter of furcation point [mm]	Ø 18	Ø 21
Length of furcation point	90	100
Number of fibers in fanouts	1-12	1-24
Connector type	SC/SCA/E2/E2A/LC/LCA/FC/FCA/ST	



Features

- Furcation point is protected by a metal sleeve with a boot,
- Protection tube may be used as a pulling grip,
- Easy and fast installation,
- Plug & Play solution,
- Common in structured cable systems,
- Wide range of fiber optic connectors.
- High quality.

Protection tubes



PTF EASYLINK 2 MULTIPATCHCORDS

Pre-connectorized multi-fiber cables PTF-Easylink 2

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
PTF	-12SCA	-12SCA	-01A <ul style="list-style-type: none"> Two digits: Cable type Letter: Fiber type 	-0100	-1095M <ul style="list-style-type: none"> First digit - Furcation type of A side; Three following digits - max. output length on A side [cm] Last letter -fanout diameter of A side; 	-1095N <ul style="list-style-type: none"> First digit - Furcation type of B side; Three following digits - max. output length on B side [cm] Last letter -fanout diameter of B side;

Available connectors	Available cables	Fiber type
1200-furcation without connectors	01-Exo-CO PE	A SMF G.652D
0000-no furcation	02-Exo-CO LSZH	B SMF G655
SC-SC UPC	03-EXO-CI PE	C SMF G656
SCA-SC APC	04-EXO-CI LSZH	D SMF G657A1
E2-E2000	05-BDC-CO PE	E SMF G657A2
E2A-E2000 APC	06-BDC-CO LSZH	F SMF G657B2
LC-LC UPC	07-BDC-CI PE	G SMF G657B3
LCA-LC APC	08-BDC-CI LSZH	H MMF OM1
FC-FC UPC		I MMF OM2
FCA-FC APC		J MMF OM2+
ST-ST UPC		K MMF OM3
		L MMF OM4

Furcation type	Protection tube type
0-equal length of outputs*	N- no tube
1-single cascade	M - protection tube with a metal end
2-double cascade	P - protection tube with a plastic end

*in case of no protection tube

Max. output length	Min. output length
70cm – For cables with up to 8 fibers and protection tube	10 cm
95cm – For cables with 9 to 24 fibers and protection tube	
200cm – For cables with up to 24 fibers without protection tube	


Available cascades
For cables with up to 8 fibers and protection tube only single cascade possible
For cables with 9 to 14 fibers and protection tube - single and double cascade possible
For cables with 15 to 24 fibers and protection tube - only single cascade possible
Single cascade - each furcation leg is shorter by 3cm than a previous one
Double cascade - Pair of furcation legs is shorter by 3cm than a previous one

Example:

PTF-12SCA-12SCA-01A-0100-1095M-1095M

EXO CO PE pre-connectorized cable with G.652D fibers, 100 m length with 12 SC APC connectors on both sides, single cascade on A and B, max. output length on A and B side - 95 cm, a protection tube with a metal end on both sides, Easylink 2.

PTF Easylink 2

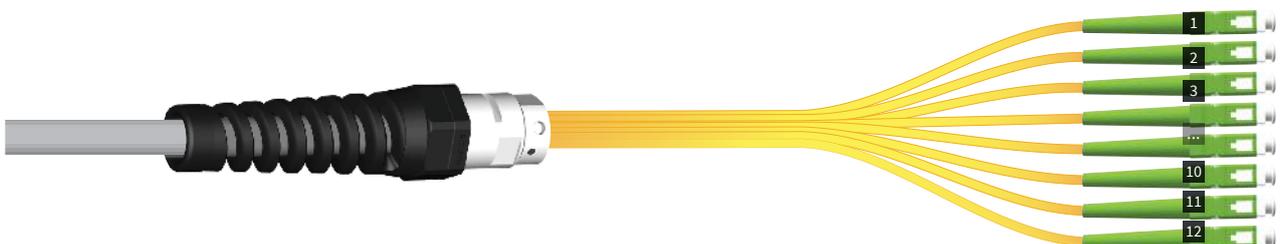

TEF SAFEBRANCH 1 MULTIPATCHCORDS

TEF SafeBranch 1 pre-connectorized multi-fiber cables

TEF SafeBranch pre-connectorized multi-fiber cables are specifically designed to be used in various indoor and outdoor FTTX applications. Therefore, furcation point construction based on epoxy filler provides extra protection, thus the product withstands outdoor conditions without attenuation increase

Safebranch fiber optic multipatchcords with 1.8mm and 2.8mm fanouts have premium parameters in tension tests (fanout in regard to a furcation point) and a version with 900µm tubes provides routing fibers in already dense assembled cabinets/racks. A spiral wrap at the output of furcation point prevents 900µm tubes from kinking. What is more, cable ties can be used for installation of these cables. Product is available with SM and MM fibers and with various connector types.

Mechanical and environmental characteristics

Parameter	Standard	
Max. tensile load	IEC 61753-2-1	7N-tuba 900µm 150N - fanout 1.8-2.8mm
Crush performance	EN 187101, IEC 60794-1-2-E3, no attenuation increase	1000N
Installation temperature range	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-10... +50 [°C]
Operation*	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-25... +70 [°C]
Transport & Storage		-25... +70 [°C]
Max. Insertion Loss	IEC 61300-3-4	≤ 0.3dB
Return Loss (RL)	IEC 61300-3-6	RL≥65 dB(APC); RL≥50 dB(SM UPC); RL≥30 dB(MM PC)

*Temperature range varies from the cable type.

Technical specification

Parameter					
Max. outer diameter of furcation point [mm]	Ø 15	Ø 18	Ø 22*	Ø 24*	Ø 27*
Length of furcation point [mm]	40 - (0.9mm) 55 - (1.8-2.8mm)	55 (0.9mm) 65 (1.8-2.8mm)	65	70	80
Number of fibers in 0.9mm tubes	1-48	49-96**			
Number of fibers in 1.8 mm fanouts	1-14	15-18	19-24	25-36	37-48**
Number of fibers in 2.8mm fanouts	1-10	11-16	17-22	23-32	33-48**
Connector type	SC/SCA/E2/E2A/LC/LCA/FC/FCA/ST				

* Ø22 - Ø27 adapted to 1.8-2.8 mm fanouts

**There is a possibility of performing pre-connectorized cables with more fibers after consulting with our sales department.



Features

- Furcation point construction based on epoxy filler provides extra protection,
- Stable attenuation,
- Wide range of fiber optic connectors,
- Crush resistance,
- A spiral wrap prevents 900 µm from kinking,
- High quality,
- Common in structured cable systems,
- Perfect solution for FTTX applications.

TEF SAFEBRANCH 1 MULTIPATCHCORDS

TEF SafeBranch 1 pre-connectorized multi-fiber cables

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
TEF	-24SCA	-24SCA	-01A <ul style="list-style-type: none"> Two digits: Cable type Letter: Fiber type 	-0100	-01201 <ul style="list-style-type: none"> First digit - Furcation type of A side; Three following digits - max. output length on A side [cm] Last digit - fanout diameter of A side; 	-11200 <ul style="list-style-type: none"> First digit - Furcation type of B side; Three following digits - max. output length on B side [cm] Last digit - fanout diameter of B side;

Available connectors	Available cables	Fiber type
2400-furcation without connectors	01-EXO-CO PE	A SMF G.652D
0000-no furcation	02-EXO-CO LSZH	B SMF G655
SC-SC UPC	03-EXO-CI PE	C SMF G656
SCA-SC APC	04-EXO-CI LSZH	D SMF G657A1
E2-E2000	05-BDC-CO PE	E SMF G657A2
E2A-E2000 APC	06-BDC-CO LSZH	F SMF G657B2
LC-LC UPC	07-BDC-CI PE	G SMF G657B3
LCA-LC APC	08-BDC-CI LSZH	H MMF OM1
FC-FC UPC	24-BURRY DAC	I MMF OM2
FCA-FC APC	25-CDI-M	J MMF OM2+
ST-ST UPC	27-CDI	K MMF OM3
	28-AERO DF 03	L MMF OM4
	33-CDAD	
	35-FTTA DAC	
	41-MK-LX4	
	42-MK-LX6	

Furcation type	Fanout type
0-equal length of outputs	0-tube 900 µm
1-single cascade	1-fanout 1.8 mm
2-double cascade	2-fanout 2.8 mm

Maximal outputs length in a standard configuration: 200 cm, minimal: 10 cm; for other outputs length please contact with our sales department.


Available cascades
Singe cascade - each furcation leg is shorter by 3 cm than a previous one
Double cascade - Pair of furcation legs is shorter by 3 cm than a previous one

Example:

TEF-24SCA-24SCA-01A-0100-01201-11200

EXO CO PE pre-connectorized cable with G.652D fibers, 100m length with 12 SC APC connectors on both sides, equal length of 1.8 mm furcation legs on A side -120 cm, single cascade on 900 mm tubes for B side, max. output length for B side- 120 cm, SafeBranch 1.

TEF SafeBranch 1

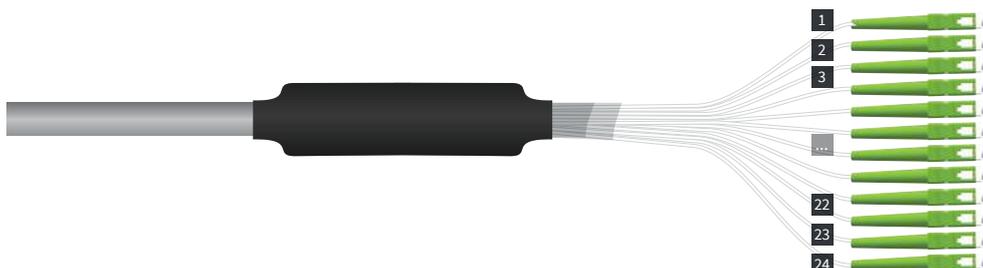

TEFM9 SAFEBRANCH 2 MULTIPATCHCORDS

TEFM9 SafeBranch 2 pre-connectorized multi-fiber cables

TEF SafeBranch 2 pre-connectorized multi-fiber cables are specifically designed to serve in various indoor and outdoor FTTX applications. The use of 900mm tubes provides routing fibers in already dense assembled cabinets/racks. Therefore, special epoxy filter construction provides extra protection, thus the product withstands outdoor conditions and the attenuation does not change its value. A spiral wrap at the output of furcation point prevents 900 μm tubes from kinking and metal furcation tubes allows for installation with the use of cable ties. A product is available with SM and MM fibers and with various connector types.

Mechanical and environmental characteristics

Parameter	Standard	
Max. tensile load	IEC 61753-2-1	7N
Crush performance	EN 187101, IEC 60794-1-2-E3, no attenuation increase	1000N
Installation temperature range	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-10... +50 [°C]
Operation*	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-25... +70 [°C]
Transport & Storage	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-25... +70 [°C]
Max. Insertion Loss	IEC 61300-3-4	≤ 0.3dB
Return Loss (RL)	IEC 61300-3-6	RL≥65 dB(APC); RL≥50 dB(SM UPC); RL≥30 dB(MM PC)

*Temperature range varies from the cable type.

Technical specification

Parameter	
Max. outer diameter of furcation point [mm]	Ø 10
Length of furcation point [mm]	30
Number of fibers	1-12
Connector type	SC/SCA/E2/E2A/LC/LCA/FC/FCA/ST



Features

- Furcation point construction based on epoxy filler provides extra protection,
- Stable attenuation,
- Wide range of fiber optic connectors,
- Crush resistance,
- A spiral wrap prevents 900 μm from kinking,
- High quality,
- Common in structured cable systems,
- Perfect solution for FTTX applications.



TEFM9 SAFEBRANCH 2 MULTIPATCHCORDS

TEFM9 SafeBranch 2 pre-connectorized multi-fiber cables

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
TEFM9	-12SCA	-12SCA	-01A <ul style="list-style-type: none"> • Two digits: Cable type • Letter: Fiber type 	-0100	-0120 <ul style="list-style-type: none"> • First digit - Furcation type of A side • Three following digits - maximal output length of A side [cm] 	-1120 <ul style="list-style-type: none"> • First digit – Furcation type of B side • Last three digits - maximal output length of B side [cm]

Available connectors	Available cables	Fiber type
0400-furcation without connectors	01-EXO-CO PE	A SMF G.652D
0000-no furcation	02-EXO-CO LSZH	B SMF G655
SC-SC UPC	03-EXO-CI PE	C SMF G656
SCA-SC APC	04-EXO-CI LSZH	D SMF G657A1
E2-E2000	24-BURRY DAC	E SMF G657A2
E2A-E2000 APC	35-FTTA DAC	F SMF G657B2
LC-LC UPC	39-MK-CX	G SMF G657B3
LCA-LC APC	40-MK-DX	H MMF OM1
FC-FC UPC		I MMF OM2
FCA-FC APC		J MMF OM2+
ST-ST UPC		K MMF OM3
		L MMF OM4

Furcation type
0-equal length of outputs
1-single cascade
2-double cascade

Maximal outputs length in a standard configuration: 200 cm, minimal: 10 cm; for other outputs length please contact with our sales department.


Available cascades
Single cascade - each furcation leg is shorter by 3 cm than a previous one
Double cascade - Pair of furcation legs is shorter by 3 cm than a previous one

Example:

TEFM9-12SCA-12SCA-01A-0100-0120-1120

EXO CO PE pre-connectorized cable with G.652D fibers, 100 m length with 12 SC APC connectors on both sides, equal length of furcation legs on A side - 120 cm, single cascade on B side, max. output length for B side - 120 cm, SafeBranch 2.

TEFM9 SafeBranch 2

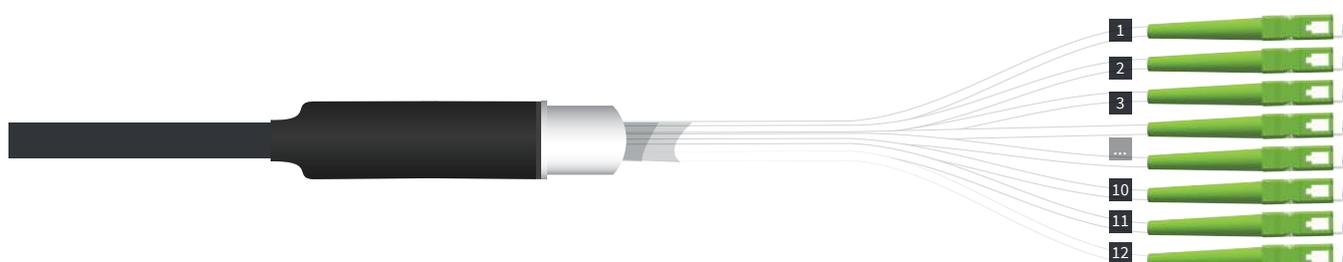

TEFM SAFEBRANCH 3 MULTIPATCHCORDS

TEFM SafeBranch 3 pre-connectorized multi-fiber cables

TEFM SafeBranch 3 pre-connectorized multi-fiber cables are specifically designed to serve in various indoor and outdoor FTTH applications. Therefore, the cables establish optical direct connection between the remote radio unit (RRU) and the base transceiver station (BTS).

Special epoxy filter construction provides extra protection, thus the product withstands environmental factors, which are characteristic features of FTTH deployments. A product is available with SM and MM fibers and with various connector types.

Thanks to high mechanical durability and resistance to outdoor conditions, the TEFM multipatchcords can be used in FTTH applications as well as demanding environments. Moreover, the connectors, which are factory installed and tested, facilitate the on-site installation. Therefore, the product can be applied in severe conditions as it has high crash resistance.

Mechanical and environmental characteristics

Parameter	Standard	
Max. tensile load	IEC 61753-2-1	150N
Crush performance	EN 187101, IEC 60794-1-2-E3, no attenuation increase	1000N
Installation temperature range	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-10... +50 [°C]
Operation*	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-40... +70 [°C]*
Transport & Storage		-40... +70 [°C]
Max. Insertion Loss	IEC 61300-3-4	≤ 0.3dB
Return Loss (RL)	IEC 61300-3-6	RL≥65 dB(APC); RL≥50 dB(SM UPC); RL≥30 dB(MM PC)

*Temperature range varies from the cable type.

Technical specification

Parameter		
Max. outer diameter of furcation point [mm]	Ø 10	Ø 12
Length of furcation point [mm]	30	30
Number of fibers in 1.8 mm fanouts	1-2	3-4
Number of fibers in 2.8 mm fanouts	1-2	3-4
Connector type	SC/SCA/E2/E2A/LC/LCA/FC/FCA/ST	



Features

- Furcation point filled with epoxy,
- Product resistant to outdoor conditions,
- Stable attenuation,
- Perfect solution for FTTH applications.
- High mechanical resistance,
- High quality,
- Wide range of fiber optic connectors,

TEFM SAFEBRANCH 3 MULTIPATCHCORDS

TEFM SafeBranch 3 pre-connectorized multi-fiber cables

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
TEFM	-02SCA	-02SCA	-01A <ul style="list-style-type: none"> • Two digits: Cable type • Letter: Fiber type 	-0100	-1120 <ul style="list-style-type: none"> • First digit - Fanout type of A side • Three following digits - maximal output length of A side [cm] 	-1120 <ul style="list-style-type: none"> • First digit – Fanout type of B side • Last three digits - maximal output length of B side [cm]

Available connectors	Available cables	Fiber type
0400-furcation without connectors	01-EXO-CO PE	A SMF G.652D
0000-no furcation	02-EXO-CO LSZH	B SMF G655
SC-SC UPC	03-EXO-CI PE	C SMF G656
SCA-SC APC	04-EXO-CI LSZH	D SMF G657A1
E2-E2000	24-BURRY DAC	E SMF G657A2
E2A-E2000 APC	35-FTTA DAC	F SMF G657B2
LC-LC UPC	39-MK-CX	G SMF G657B3
LCA-LC APC	40-MK-DX	H MMF OM1
FC-FC UPC		I MMF OM2
FCA-FC APC		J MMF OM2+
ST-ST UPC		K MMF OM3
		L MMF OM4

Fanout type
1-fanout 1.8 mm
2-fanout 2.8 mm

Maximal outputs length in a standard configuration: 200 cm, minimal: 10 cm; for other outputs length please contact with our sales department.

Example:

TEFM-2SCA-2SCA-01A-0100-1120-1120

EXO CO PE pre-connectorized cable with G.652D fibers, 100 m length with 2 SC APC connectors on both 1.8 mm fanout sides, equal length of A and B side - 120 cm, SafeBranch 3.

TEFM SafeBranch 3



TEFC9 SAFEBRANCH 4 MULTIPATCHCORDS

TEFC9 SafeBranch 4 pre-connectorized multi-fiber cables

TCEF9 SafeBranch 4 pre-connectorized multi-fiber cables are specifically designed for use in FTXX applications, where space is limited. The use of 900 μm and microcables provides proper assembly of cabinets and saves space for the future applications. Therefore, special epoxy filler construction provides extra protection, thus the product withstands outdoor conditions.

Corrugated tube at the output of furcation point prevents from fiber damage at the sharp edges of subrack/ patchpanel entries. Product is available with SM and MM fibers and with various connector types.



Mechanical and environmental characteristics

Parameter	Standard	
Max. tensile load	IEC 61753-2-1	7N
Crush performance	EN 187101, IEC 60794-1-2-E3, no attenuation increase	1000N
Installation temperature range	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-10... +50 [°C]
Operation*	EN 187101, IEC 60794-1-2-F1, no attenuation increase	-25... +70 [°C]
Transport & Storage		-25... +70 [°C]
Max. Insertion Loss (IL)	IEC 61300-3-4	≤ 0.3dB
Return Loss (RL)	IEC 61300-3-6	RL≥65 dB(APC); RL≥50 dB(SM UPC); RL≥30 dB(MM PC)

*Temperature range varies from the cable type.

Features

- Furcation point filled with epoxy,
- Product resistant to outdoor conditions,
- Stable attenuation,
- Perfect solution for FTXX applications,
- High mechanical resistance,
- High quality,
- Room saving solution thanks to 900um tubes and microcables,
- Wide range of fiber optic connectors.

Technical specification

Parameter		
Max. outer diameter of furcation point	Ø13	Ø18
Length of furcation point	65	65
Number of fibers	13-48	49-96*
Connector type	SC/SCA/E2/E2A/LC/LCA/FC/FCA/ST	

In order to design design pre-connectorized cables with higher number of fibers please contact with our sales department.



TEFC9 SAFEBRANCH 4 MULTIPATCHCORDS

TEFC9 SafeBranch 4 pre-connectorized multi-fiber cables

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
TEFC9	-24SCA	-24SCA	-01A <ul style="list-style-type: none"> Two digits: Cable type Letter: Fiber type 	-0100	0120 <ul style="list-style-type: none"> First digit - Furcation type of A side Three following digits - maximal output length of A side [cm] 	1120 <ul style="list-style-type: none"> First digit - Furcation type of B side Last three digits - maximal output length of B side [cm]

Available connectors	Available cables	Fiber type
0400-furcation without connectors	01-EXO-C0 PE	A SMF G.652D
0000-no furcation	02-EXO-C0 LSZH	B SMF G655
SC-SC UPC	03-EXO-CI PE	C SMF G656
SCA-SC APC	04-EXO-CI LSZH	D SMF G657A1
E2-E2000	05-BDC-C0 PE	E SMF G657A2
E2A-E2000 APC	06-BDC-C0 LSZH	F SMF G657B2
LC-LC UPC	07-BDC-CI PE	G SMF G657B3
LCA-LC APC	08-BDC-CI LSZH	H MMF OM1
FC-FC UPC	24-BURRY DAC	I MMF OM2
FCA-FC APC	28-AERO DF 03	J MMF OM2+
ST-ST UPC	35-FTTA DAC	K MMF OM3
	41-MK-LX4	L MMF OM4
	42-MK-LX6	

Furcation type
0-equal length of outputs
1-single cascade
2-double cascade

Maximal outputs length in a standard configuration: 200 cm, minimal: 10 cm; for other outputs length please contact with our sales department.


Available cascades
Singe cascade - each furcation leg is shorter by 3cm than a previous one
Double cascade - Pair of furcation legs is shorter by 3cm than a previous one

Example:

TEFC9-24SCA-24SCA-01A-0100-0120-1120

EXO CO PE pre-connectorized cable with G.652D fibers, 100 m length with 24 SC APC connectors on both sides, equal length on A side -120 cm, single cascade on B side, max. output length for B side - 120 cm, SafeBranch 4.

TEFC9 SafeBranch 4

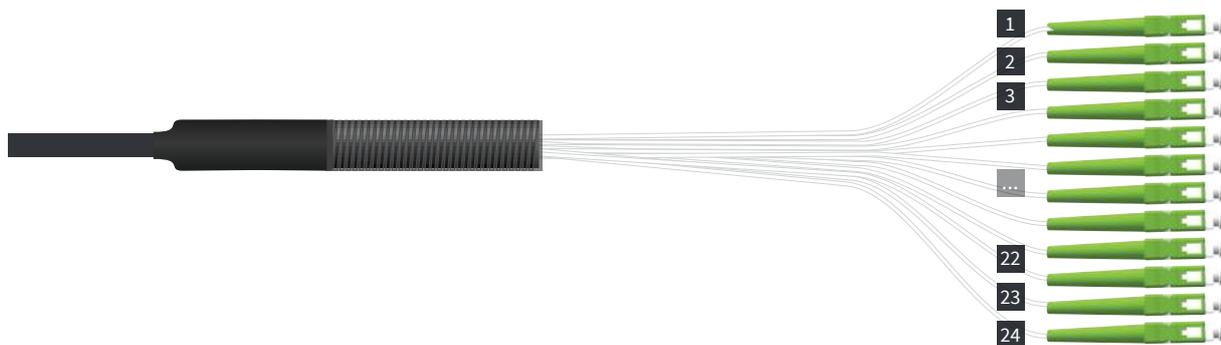

MULTIPATCHCORDS IN CORRUGATED TUBES

Pre-connectorized multi-fiber cables in corrugated tubes

Pre-connectorized cables in a corrugated tube provides easy and fast cable installation in teletechnical floors or in the concrete. A corrugated tube placed on an optical fiber guarantees additional protection especially from mechanical damages and crushes. Therefore, the tubes are very often used in new buildings, where the network is being installed, and then cables might be easily changed.

It is a Plug&Play solution which does not require any expensive equipment, and thus significantly reduce the total costs in comparison to fusion spliced fibers.



Reference scheme

Furcation	Furcation type	Number and connector type		Cable/fiber type	Total length [m]	Furcation (Side A)		Furcation (Side B)	
		(Side A)	(Side B)						
C16*	-1	-12SCA	-12SCA	-01A <ul style="list-style-type: none"> • Two digits: Cable type • Letter: Fiber type 	-0100	01201 <ul style="list-style-type: none"> • First digit - Furcation type of A side • Three following digits - maximal output length of A side [cm] • Last digit - maximal output length of A side 	11200 <ul style="list-style-type: none"> • First digit - Furcation type of B side • Last three digits - maximal output length of B side [cm] • Last digit - maximal output length of B side 		

***Letter** - cable in corrugated tube, **two digits** - external diameter of corrugated tube

Available diameter of corrugated tube	Furcation type	Available connectors	Available cables	Fiber type
7mm	1-TCF	0400-furcation without connectors	01-EXO-C0 PE	A SMF G.652D
10mm	2-TEF	0000-no furcation	02-EXO-C0 LSZH	B SMF G655
11mm	3-PTF	SC-SC UPC	03-EXO-CI PE	C SMF G656
12mm	4-TEFM	SCA-SC APC	04-EXO-CI LSZH	D SMF G657A1
14mm	5-TEFM9	E2-E2000	05-BDC-C0 PE	E SMF G657A2
16mm	6-HF	E2A-E2000 APC	06-BDC-C0 LSZH	F SMF G657B2
18mm		LC-LC UPC	07-BDC-CI PE	G SMF G657B3
20mm		LCA-LC APC	08-BDC-CI LSZH	H MMF OM1
22mm		FC-FC UPC	24-BURRY DAC	I MMF OM2
25mm		FCA-FC APC	25-CDI-M	J MMF OM2+
32mm			27-CDI	K MMF OM3
			28-AERO DF 03	L MMF OM4
			33-CDAD	
			35-FTTA DAC	
			41-MK-LX4	
			42-MK-LX6	

The length of a corrugated pipe equals the length between the furcations reduced by 0.5 m (one-side terminated cable) or 1m (a cable terminated on-both sides).

Furcation type	Fanout type
0-equal length of outputs	0-tube 900µm
1-single cascade	1-fanout 1.8mm
2-double cascade	2-fanout 2.8mm

Maximal outputs length in a standard configuration: 200 cm, minimal: 10 cm; for other outputs length please contact with our sales department.

Available cascades
Singe cascade - each furcation leg is shorter by 3cm than a previous one
Double cascade - Pair of furcation legs is shorter by 3cm than a previous one

Example:

C16-1-12SCA-12SCA-01A-0100-01201-11200

EXO CO PE pre-connectorized cable protected by corrugated tube of 16 mm outer diameter, with G.652D fibers, 100 m length with 12 SC APC connectors on both sides, equal length of 1.8mm furcation legs on A side - 120 cm, single cascade on 900 µm tubes for B side, max. output length for B side - 120 cm, Easylink 1.

TCEF MULTIPATCHCORDS

Hybrid Furcation

TCEF pre-connectorized multi-fiber cables with a furcation of TCF on A side and TEF on B side. Technical specification and mechanical as well as environmental parameters are given on the proper pages in the catalogue.

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
TCEF	-12SCA	-12SCA	-01A <ul style="list-style-type: none"> • Two digits: Cable type • Letter: Fiber type 	-0100	01201 <ul style="list-style-type: none"> • First digit - Furcation type of A side • Three following digits - maximal output length [cm] • Last digit - fanout diameter of A side 	11200 <ul style="list-style-type: none"> • First digit - Furcation type of B side • Last three digits - maximal output length of B side [cm] • Last digit - fanout diameter of B side

Available connectors	Available cables	Fiber type
1200-furcation without connectors	01-EXO-C0 PE	A SMF G.652D
SC-SC UPC	02-EXO-C0 LSZH	B SMF G655
SCA-SC APC	03-EXO-CI PE	C SMF G656
E2-E2000	04-EXO-CI LSZH	D SMF G657A1
E2A-E2000 APC	05-BDC-C0 PE	E SMF G657A2
LC-LC UPC	06-BDC-C0 LSZH	F SMF G657B2
LCA-LC APC	07-BDC-CI PE	G SMF G657B3
FC-FC UPC	08-BDC-CI LSZH	H MMF OM1
FCA-FC APC	24-BURRY DAC	I MMF OM2
ST-ST UPC	25-CDI-M	J MMF OM2+
	27-CDI	K MMF OM3
	28-AERO DF 03	L MMF OM4
	33-CDAD	
	35-FTTA DAC	
	41-MK-LX4	
	42-MK-LX6	

Furcation type	Fanout type
0-equal length of outputs	0-tube 900µm
1-single cascade	1-fanout 1.8mm
2-double cascade	2-fanout 2.8mm

Maximal outputs length in a standard configuration: 200 cm, minimal: 10 cm; for other outputs length please contact with our sales department.

Available cascades
Single cascade - each furcation leg is shorter by 3cm than a previous one
Double cascade - Pair of furcation legs is shorter by 3cm than a previous one

Example:

TCEF-12SCA-12SCA-01A-0100-01201-11200

EXO CO PE pre-connectorized cable protected by corrugated pipe of 16 mm outer diameter, with G.652D fibers, 100 m length with 12 SC APC connectors on both sides, equal length of 1.8 mm furcation legs on A side - 120 cm, single cascade on 900 µm tubes for B side, max. output length for B side- 120 cm, Easylink 1 – SafeBranch 1.

Furcation TEF



Furcation TCF



TPEF MULTIPATCHCORDS

Hybrid Furcation

TPEF pre-connectorized multi-fiber cables with a furcation of PTF on A side and TEF on B side. Technical specification and mechanical as well as environmental parameters are given on the proper pages in the catalogue.

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
TPEF	-12SCA	-12SCA	-01A <ul style="list-style-type: none"> Two digits: Cable type Letter: Fiber type 	-0100	1095M <ul style="list-style-type: none"> First digit - Furcation type of A side Three following digits - maximal output length of A side [cm] Last letter - Protection tube type on A side 	11201 <ul style="list-style-type: none"> First digit - Furcation type of B side Last three digits - maximal output length of B side [cm] Last digit - fanout diameter of B side

Available connectors	Available cables	Fiber type
1200-furcation without connectors	01-EXO-CO PE	A SMF G.652D
SC-SC UPC	02-EXO-CO LSZH	B SMF G655
SCA-SC APC	03-EXO-CI PE	C SMF G656
E2-E2000	04-EXO-CI LSZH	D SMF G657A1
E2A-E2000 APC	05-BDC-CO PE	E SMF G657A2
LC-LC UPC	06-BDC-CO LSZH	F SMF G657B2
LCA-LC APC	07-BDC-CI PE	G SMF G657B3
FC-FC UPC	08-BDC-CI LSZH	H MMF OM1
FCA-FC APC		I MMF OM2
ST-ST UPC		J MMF OM2+
		K MMF OM3
		L MMF OM4

Example:

TPEF-12SCA-12SCA-01A-0100-1095M-11201

EXO CO PE pre-connectorized cable, with G.652D fibers, 100m length with 12 SC APC connectors on both sides, a single cascade on A side, max. output length on A side: 95 cm, a protection tube with a metal end, a single cascade on 1.8mm furcation legs on B side, max. output length for B side- 120cm, Easylink 2 – SafeBranch 1.



Furcation type		Options	
A Side (PTF)	B Side (TEF)	Protection tube type (PTF)	Fanout type(TEF)
0-Equal length of furcation output legs	0-Equal length of furcation output legs	N-no tube	0-900µm tube
1-Single cascade	1-Single cascade	M- tube with a metal end	1-fanout 1.8mm
2-Double cascade	2-Double cascade	P- tube with a plastic end	2-fanout 2.8mm

*in case of no protection tube.

Maximal length of output leg		Minimal length of output leg	
A Side (PTF)	B Side (TEF)	Protection tube type (PTF)	Fanout type(TEF)
70 cm – up to 8 fibers with a protection tube	200cm		10 cm
95 cm – from 9 up to 24 fibers with a protection tube			
200cm- up to 24 fibers without a protection tube			

In order to design longer output legs - please contact with our sales department.

Available cascades	
A Side (PTF)	B Side (TEF)
For cables with up to 8 fibers and protection tube - only single cascade possible	Single cascade- each furcation leg is shorter by 3cm than a previous one
For cables with 9 to 14 fibers and protection tube - single and double cascade possible	Double cascade- pair of furcation legs is shorter by 3cm than a previous one
For cables with 15 to 24 fibers and protection tube - only single cascade possible	
Single cascade- each furcation leg is shorter by 3cm than a previous one	
Double cascade- Pair of furcation legs is shorter by 3cm than a previous one	

TPCF MULTIPATCHCORDS

Hybrid Furcation

TPCF pre-connectorized multi-fiber cables with a furcation of PTF on A side and TCF on B side. Technical specification and mechanical as well as environmental parameters are given on the proper pages in the catalogue.

Reference scheme

Furcation	Number and connector type (Side A)	Number and connector type (Side B)	Cable/fiber type	Total length [m]	Furcation (Side A)	Furcation (Side B)
TPCF	-12SCA	-12SCA	-01A <ul style="list-style-type: none"> Two digits: Cable type Letter: Fiber type 	-0100	1095M <ul style="list-style-type: none"> First digit - Furcation type of A side Three following digits - maximal output length of A side [cm] Last letter - Protection tube type on A side 	11201 <ul style="list-style-type: none"> First digit - Furcation type of B side Last three digits - maximal output length of B side [cm] Last digit - fanout diameter of B side

Available connectors	Available cables	Fiber type
1200-furcation without connectors	01-EXO-CO PE	A SMF G.652D
SC-SC UPC	02-EXO-CO LSZH	B SMF G655
SCA-SC APC	03-EXO-CI PE	C SMF G656
E2-E2000	04-EXO-CI LSZH	D SMF G657A1
E2A-E2000 APC	05-BDC-CO PE	E SMF G657A2
LC-LC UPC	06-BDC-CO LSZH	F SMF G657B2
LCA-LC APC	07-BDC-CI PE	G SMF G657B3
FC-FC UPC	08-BDC-CI LSZH	H MMF OM1
FCA-FC APC		I MMF OM2
ST-ST UPC		J MMF OM2+
		K MMF OM3
		L MMF OM4

Example:

TPCF-12SCA-12SCA-01A-0100-1095M-11201

EXO CO PE pre-connectorized cable, with G.652D fibers, 100m length with 12 SC APC connectors on both sides, a single cascade on A side, max. output length on A side: 95 cm, a protection tube with a metal end, a single cascade on 1.8mm furcation legs on B side, max. output length for B side- 120cm, Easylink 2 – Safe-Branch 1.



Furcation type		Options	
A Side (PTF)	B Side (TCF)	Protection tube type (PTF)	Fanout type(TCF)
0-Equal length of furcation output legs	0-Equal length of furcation output legs	N-no tube	0-900µm tube
1-Single cascade	1-Single cascade	M- tube with a metal end	1-fanout 1.8mm
2-Double cascade	2-Double cascade	P- tube with a plastic end	2-fanout 2.8mm


*in case of no protection tube.

Maximal length of output leg		Minimal length of output leg	
A Side (PTF)	B Side (TCF)	Protection tube type (PTF)	Fanout type(TCF)
70 cm – up to 8 fibers with a protection tube	200cm		10 cm
95 cm – from 9 up to 24 fibers with a protection tube			
200cm- up to 24 fibers without a protection tube			

In order to design longer output legs - please contact with our sales department.

Available cascades	
A Side (PTF)	B Side (TCF)
For cables with up to 8 fibers and protection tube - only single cascade possible	Singe cascade - each furcation leg is shorter by 3cm than a previous one
For cables with 9 to 14 fibers and protection tube - single and double cascade possible	Double cascade - pair of furcation legs is shorter by 3cm than a previous one
For cables with 15 to 24 fibers and protection tube - only single cascade possible	
Singe cascade- each furcation leg is shorter by 3cm than a previous one	
Double cascade- Pair of furcation legs is shorter by 3cm than a previous one	

Mechanical
connectors&splices
Rapid Series

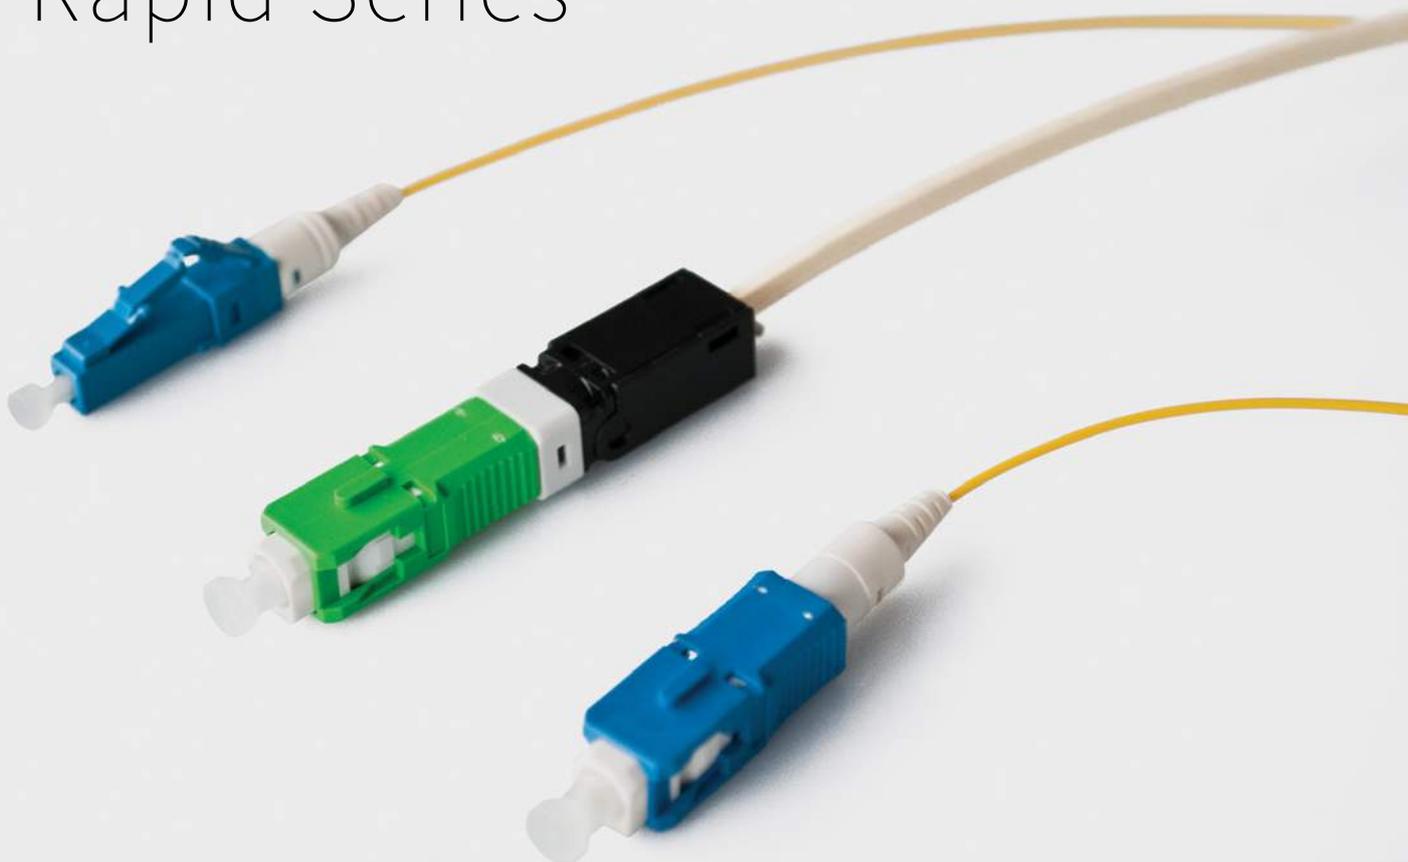

RAPID CONNECTOR

Fibrain Rapid Connectors are specifically designed to terminate optical fibers in installation place. The Rapid Connector is a pre-polished, pre-assembled connector compatible with the standard LC&SC connectors. Total assembly time together with fiber preparation do not exceeds 120 seconds, and requires no extra tools. The ferrules are factory polished, thus no extra polishing materials are necessary. Also the clamp system in the V-grooves, where immersion gel is placed, eliminates the necessity to use other adhesives or epoxy gel and improves the transmission parameters. High quality index matching gel, whose refractive index is close to refractive index of the core of optical fiber, significantly improves Return Loss.

The Fibrain Rapid Connector series includes the connectors which can be used to terminate singlemode and multimode optical fibers in 250 μm and 900 μm coating. Moreover, the series is equipped with a special connector construction specifically designed for VC-DCY Drop cables, which are used in FTTH systems. The connectors are mounted on an external cable sheath, not only on a fiber in 250 μm covering, which guarantees higher protection of a connection and eliminate possibility of breaking the fiber.

Excellent transmission parameters, easy assembly in installation place and time saving, are only some benefits of the new series of Fibrain Rapid Connector.

Reference scheme

Series	Connector type	Fiber type	Cable type
RC01	1 SC PC	1 SM 9/125 μm	1 250/900 μm
	2 SC APC	2 MM 50/125 μm OM2	2 Drop cable VC-DCY
	3 LC PC	3 MM 62.5/125 μm OM1	
		4 MM 62.5/125 μm OM3	

RC01-212 Fibrain Rapid Connector SC APC for VC-DCY Drop cables.


Additional accessories

RC01- J Assembly Adapter

Provides proper stripping length during Rapid Connector's assembly on VC-DCY Drop cables.



Available colors Rapid Connectors SC PC/APC 250/900 μm

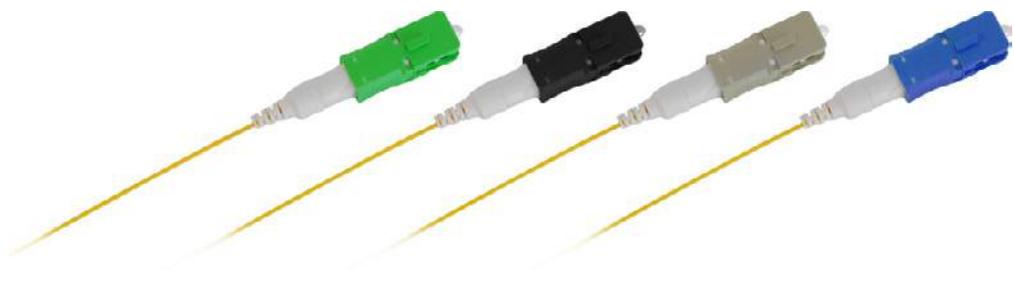

Features

- Termination time does not exceed 120 s,
- Easy and fast assembly,
- Excellent transmission parameters,
- High quality materials,
- A ferrule polished in a Premium Class has excellent ferrule end face geometry parameters,
- A termination is performed with a use of standard equipment,
- Durability and resistance of the matching gel for even 25 years,
- Exceeds TIA/EIA-568-B.3 standards.

Applications

- LAN networks,
- WAN networks,
- FTTH networks,
- Telecommunication networks,
- CATV networks,
- Intra-building.

Technical specifications

Parameter	Connectors		
	SM PC	SM APC	MM PC
Insertion Loss IL_{TYP}	0.20 dB	0.30 dB	0.10 dB
Return Loss RL	55 dB	60 dB	35 dB
Durability	< 0.10 dB / 500 matings		
Operating temperature	-40 to +75°C		
Connector type	SC, SCA, LC		

RAPID SPLICE

Fibrain Rapid Splice mechanic splices provide high quality fiber optic connections. They can be characterized by short termination time.

Mechanical splice connection makes use of mechanical splice unit where 2 fibers are first inserted into the unit (fibers are set to the V-groove of the mechanical splice). The fibers are next aligned and then held in position by clamping parts. s. Index matching gel is added to the center of the mechanical splice (at the supposed connection point of the two fibers) to ensure good Insertion and Return Loss.



Reference scheme

Product code	Description
FB7195	Fibrain Rapid Splice


Additional accessories

FB7197.1 Assembly tool for mechanical splicer with additional holder

(FB7197.21 - Holder for 900 µm tube or FB7197.31 Holder for 250 µm fiber)

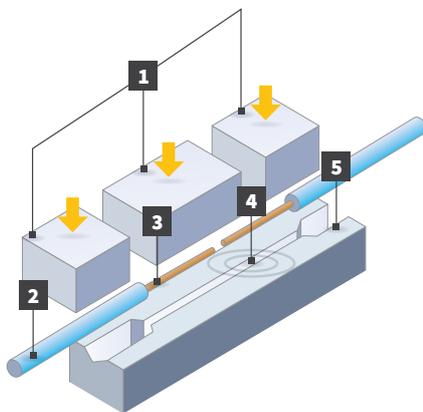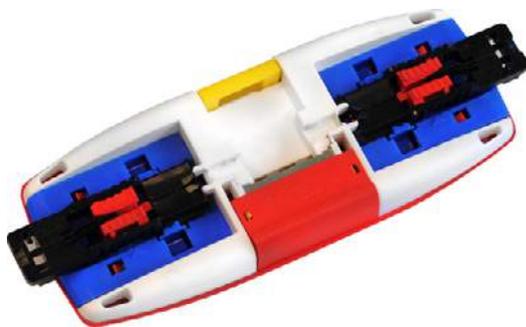

1. Clamping part (3 sections, which guarantee high quality connection)
2. Optical fiber (250µm or 900µm coating)
3. Optical fiber (outercoat stripped, 125 µm outer diameter)
4. Index matching gel
5. V-groove substrate

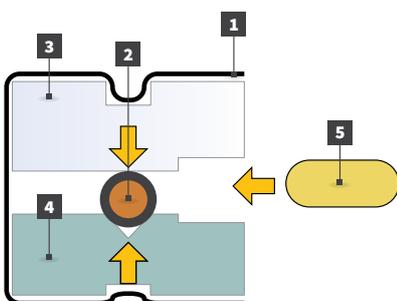

1. Metal clip closing splice
2. Optical fiber
3. Clamping part
4. V-groove positioning fiber
5. Wedge (When wedge is inserted into mechanical splice, the space at the V-groove substrate is enlarged, allowing fiber to be inserted into the mechanical splice)



Features

- Universal construction providing fibers connection in 250 µm and 900 µm,
- 3 sections, which guarantee high quality connection),
- High quality of V-grooves providing connection of multimode and singlemode fibers,
- Small dimensions: 4x4x40 mm,
- Termination time is shorter than 120 s,
- Possibility of performing one splice again,
- Connection of optical fiber is performed without any fusion splices,
- High quality immersion gel determine excellent Insertion and Return Loss,
- Much faster compared to fusion splicing method,
- Fast and easy splicing of 250 or 900 µm SM/MM fibers.

Applications

- LAN networks,
- WAN networks,
- FTTH networks,
- Telecommunication networks,
- CATV networks.

Technical specifications

Parameter	
Insertion Loss IL_{TYP}	≤ 0.15 dB
Insertion Loss IL_{MAX}	≤ 0.50 dB
Return Loss RL	≥ 40 dB
Operating temperature	-30 to 60°C
Dimensions	4x4x40mm

NOTES

A series of horizontal dashed lines for writing notes.

FIBRAIN SP. Z O.O.

Rogoźnica 312
36-060 Głogów Małopolski
Poland

tel: +48 17 866 08 12 – 14

fax: +48 17 866 08 11

e-mail: info@fibrain.com

FIBRAIN MÉXICO

Paseo de la Reforma 250 / Piso 9
Esquina c/Niza, Col. Juárez
Del. Cuahémoc
México D.F. 06600

tel: (+52) 55 3600 7546

e-mail: info@fibrain.com.mx

www.fibrain.com

FIBRAIN ®