


Type:	LBR cable	REV: 1
Issued:	17/09/2014	SK
Modified:	13/10/2015	PB

Indoor / Outdoor Breakout Cable up to 24 fibers with Subcables LBR

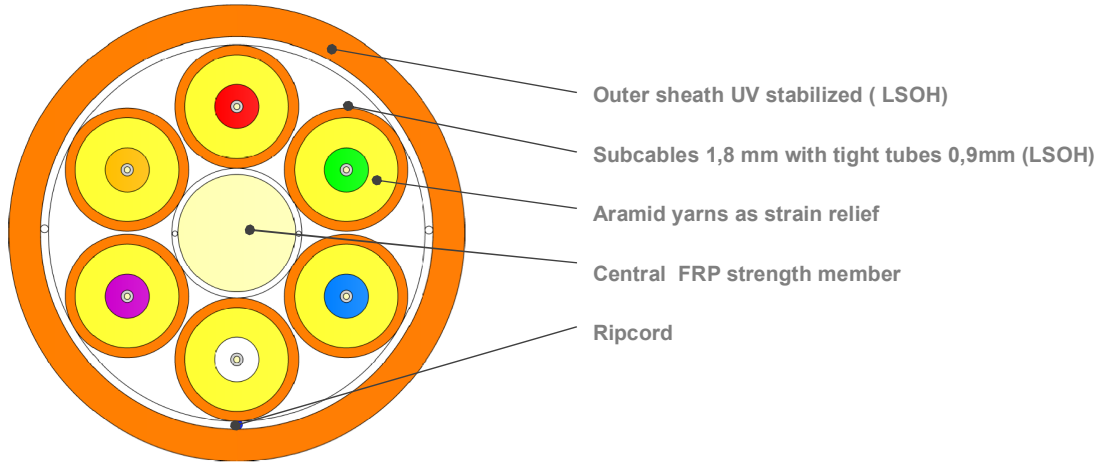

*not in scale

APPLICATION:

Cable for indoor installation
For distribution networks in multifamily buildings
For use in places with fire exposed
FTTD Connections

STRUCTURE AND COMPOSITION:

Tight buffers 900µm up to 24 pcs in cable
Fully dielectric cable,
Aramid yarns as tensile elements
UV Resistant and flame retardant outer sheath LSOH

CABLE DESIGN:

Variant	Subcables	Ø nominal (±5%)	Nominal weight (±10%)	Max short term tensile load	Max long term tensile load
	[pcs]	[mm]	[kg/km]	[N]	[N]
4F	4	6,5	48	750	250
6F	6	7,5	63	1200	400
8F	8	8,7	85	1500	500
12F	12	10,9	131	1500	500
16F	16	11,3	119	1700	550
18F	18	11,3	131	1700	550
24F	24	13,0	179	2000	660

TECHNICAL AND ENVIRONMENTAL CABLE CHARACTERISTICS

Crush performance	IEC 60794-1-2-E3, $\Delta\alpha \leq 0,05$ dB	2000 N
Bending performance	IEC 60794-1-2-E11 15xD, $\Delta\alpha \leq 0,05$ dB	No damage
Temperature range Installation	IEC 60794-1-2-F1, $\Delta\alpha \leq 0,05$ dB/km	-5... +55 [°C]
Operation		-20... +70 [°C]
Transport & Storage		-40... +70 [°C]

(* All values for single-mode optical fibres, all optical parameters for wavelength 1550nm)

OPTICAL FIBRES AND LOOSE TUBES COLOUR IDENTIFICATION

Fibres and tubes identification information see DSH_Colors_CODE_XXXX document.

FIBRES PARAMETERS

Optical fibres parameters see DSH_OFP document.

MARKING

The following printing (using jet printer) is applied at 1-meter intervals.

- Supplier: FIBRAIN
- Standard Code (Product Type, Fiber Type, Fiber Count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID/ Drum No

Example: FIBRAIN LBR 12F SM G652D "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is $\pm 0,5\%$. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

Type:	LBR cable	REV: 1
Issued:	17/09/2014	SK
Modified:	13/10/2015	PB

PACKING


Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Rotation direction arrow will be marked on the drum together with identification information.

DELIVERY LENGTH


2000 – 8000 meters ± 5%, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

STANDARD OUTER JACKET COLOUR :


PE Black RAL9005



LSOH Grey RAL7022




LSOH Light Grey RAL7037




OUTER JACKET COLOUR OPTIONS*:

SM G.652D




RAL 1021

SM G657A1, A2, A3




RAL 9010

MM 50/125 OM2




RAL2003

MM 50/125 OM3



RAL6027

MM 50/125 OM4



RAL 4003

*On request.

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

The information is believed to be correct at the time of issue. Fibrain reserves the right to change this specification without prior notice. This specification is not contractually valid unless specifically authorised by Fibrain. Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Terms of Sale of the selling Fibrain subsidiary.